


BuzziSkin

INSTALLATION MANUAL



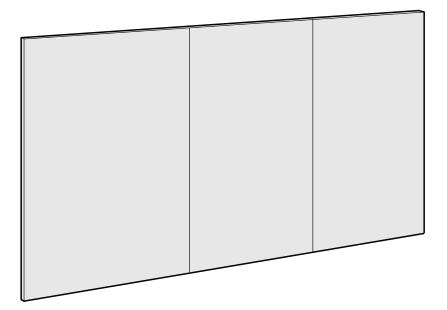

Technical info

To DoP_P0066-Skin-01 EN15102 0493 Wall Covering C-s2,do Formaldehyd: pass VCM: pass Heavy metals: pass

BuzziSkin is made of 100% recycled PET bottles and has excellent acoustic characteristics.

No claims concerning deviation in color, size, and thickness can be accepted. Because of the nature of the product this can variate. The risk is more likely in different batches.

Even from the same batch we can not guarantee that there will be no color differences. However the risk will be lower.

Please specify the batch number if a re-order needs to be done.

If possible we deliver from the same batch.

USE

Skin can be used on all surfaces with the following exception.

- Skin can not be applied on vinyl or any other plasticized surface.
- Skin is not suitable as seating because it will become fluffy.
- We do not recommend installing BuzziSkin to the ceiling or floor.

INSTALLATION TIPS

A When opening the boxes keep notice of the batch number.

(Charge number)

After installation, no claims are accepted.


Installation should be done by professionals!

- Please keep the direction of the BuzziSkin in mind. This is printed on the back of the foil.
- Do not apply on bare, untreated surfaces. Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.
- The surface should be smooth, dry, well degreased and dust free.
- Pre-measure the whole surface and cut the BuzziSkin with a sharp knife.
- All corners must be made of separate lanes.
- For easy mounting it is possible to use wallpaper paste but this is not necessary.
- BuzziSkin is not intended to mask roughnesses.


BuzziSkin 2 PERS. Excluded







Included

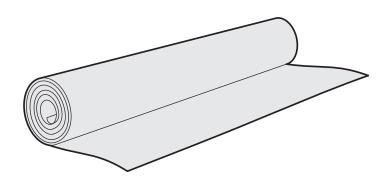

Variation in color, thickness and density may occur.

