

SPECIFICATION

Range: **BAFFLE DIRECT**
Design: **Marc Sadler**

“Snowsound Technology” sound-absorbing element, ceiling fixing.

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panel has an **Italian Class1** fire reaction and **Euroclass B-s2, d0**.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained “**Acoustic Absorption Class A**”, in accordance with UNI EN ISO 11654.

Panel dimensions:

- 75x44 cm
- 119x44 cm
- 139x44 cm
- 159x44 cm
- 179x44 cm

Fixing kit description:

The ceiling fixing kit consists of two cylindrical elements, made of chrome-plated metal \varnothing 12 mm, which embrace the edge of the panel. These elements allow, by means of 14x50 mordant screws fixed into the edge of the panel, direct joining without the aid of other accessories. To these elements are attached, respectively: two M26 male/female threaded cylindrical elements and an internal threaded element that has a countersink for the passage of the ceiling fixing screws.

A chromium-plated steel ring nut knurled on the outside is screwed to this element.

The products described in this data sheet are **CE marked** according to the harmonized product standard EN 13964 for the intended use as a drop ceiling.



Available colors:



Light blue



Brick red



Dark grey




Carrot orange



Red



Silver grey



Dove-grey



Sun yellow



Teal



White



Beige



Light green



Cool white

*available only for sizes:
119x44 / 159x44
119x59 / 159x59 cm



Black

*available only for sizes:
119x44 / 159x44
119x59 / 159x59 cm



Caimi Brevetti S.p.A. si riserva, a proprio insindacabile giudizio, la facoltà di modificare senza preavviso i materiali, le caratteristiche tecniche ed estetiche, nonché le dimensioni degli elementi illustrati nella presente scheda tecnica le cui immagini e colori sono puramente indicativi.

SPECIFICATION

Range: **BAFFLE DIRECT**
Design: **Marc Sadler**

“Snowsound Technology” sound-absorbing element, wall/ceiling fixing

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panel has an **Italian Class1** fire reaction and **Euroclass B-s2, d0**.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained “**Acoustic Absorption Class A**”, in accordance with UNI EN ISO 11654.

Panel dimension: 159x22 cm

Fixing Kit Description:

The wall/ceiling fixing kit consists of two cylindrical elements, made of ø 12 mm chrome-plated metal, which embrace the edge of the panel. These elements allow, by means of 14x50 mordant screws fixed in the edge of the panel, direct joining without the aid of other accessories. To these elements are attached, respectively: two M26 male/female threaded cylindrical elements and an internal threaded element that has a countersink for the passage of the wall/ceiling fixing screws.

A chromium-plated steel ring nut knurled on the outside is screwed to this element.

The products described in this data sheet are **CE marked** according to the harmonized product standard EN 13964 for the intended use as a drop ceiling.



Available colors:

0001





White

8007



Dark grey

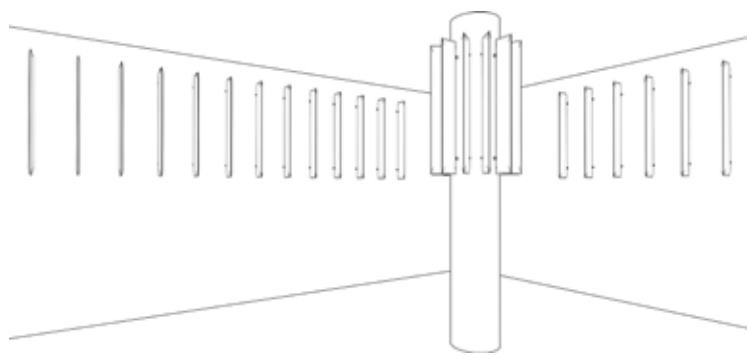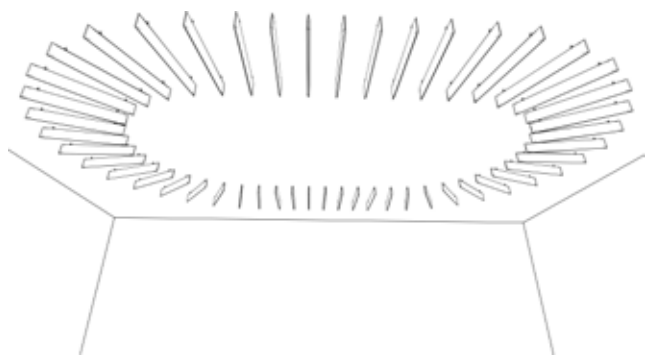

Caimi Brevetti S.p.A. reserves, by its unappealable judgment, the right to modify without prior notice the building materials, the technical and aesthetic specifications, as well as the dimensions of the products in this technical sheet, where pictures are purely as an indication.