


BIGGER,
BETTER
& BOLDER

- ✓ 20 year residential warranty
- ✓ 10 year commercial warranty
- ✓ XL sizes

Could you choose between design, quality and convenience? Thankfully, you don't have to. The luxury vinyl floors in the Transform collection offer added value at every level.

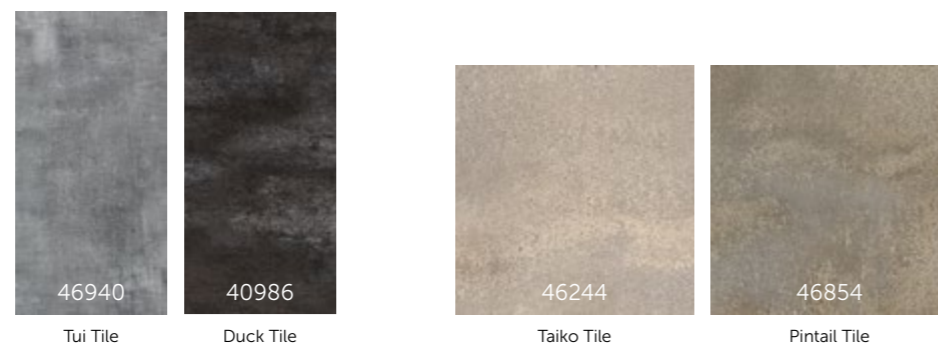

TECHNICAL INFORMATION TABLE

PRODUCT INFORMATION

Level of use	EN ISO 10874	23 - 33 - 42
Total thickness	EN ISO 24346	2,50 mm
Wear layer	EN ISO 24340	0,55 mm
Wear layer PUR treatment		Protectonite®
Total weight g/m ²	EN ISO 23997	4059

SIZE & PACKING

Planks	EN ISO 24342	19,6 x 132,0 cm
Tiles size A	EN ISO 24342	32,9 x 65,9 cm
Tiles size B	EN ISO 24342	60,9 x 60,9 cm
Box planks	14 pcs/box	3,62 m ² /box
Box tiles A	16 pcs/box	3,47 m ² /box
Box tiles B	10 pcs/box	3,72 m ² /box

TEST RESULTS

Inflammability	EN13501-1	Bfl-S1
Critical radiant flux	AS/ISO 9239.1-2003	> 7.9 kW/m ² < 216 %.min
Scratch resistance	EN 660-2	Class T
Squareness & straightness	EN ISO 24342	≤ 0.35 mm
Slip resistance	EN 13893	DS
Slip restraint	DIN 51130	R10
Residual indentation	EN ISO 24343-1	Norm: ≤ 0.10 mm Average result measured: 0.03 mm
Furniture leg resistance	EN ISO 16581	No damage
Curling	EN ISO 23999	≤ 2 mm
Electrical resistance	EN 1081	≤ 10 ⁹ Ohm
Dimensional stability	EN ISO 23999	Norm: ≤ 0.25% Average result measured: ≤ 0.05%
Heat insulation	EN 12524	0.25 w/(m.K)
Thermal resistance R	EN ISO 12664	0.0100 m ² .K/W
Electrostatic performance	EN 1815	< 2 kV
Formaldehyde group	EN 717-1	E1
Acoustic insulation	EN ISO 717-2	3 dB
Acoustic insulation + Flex Pro underlay	EN ISO 717-2	10 dB
Castor chair resistance	EN ISO 4918	No damage
Stain resistance	EN ISO 26987	Very good
Light fastness	ISO 105-B02	≥ 6
Underfloor heating	EN 12524	Suitable, max 27°C
Warranty		20 Residential 10 Commercial

