HANAMI Design Archirivolto

Quinti®

Advanced executive armchair of Quinti collection entirely made in foamed polyurethane. Available in two versions :
1.SOFT
2.WRINKLES (AVAILABLE ONLY IN LEATHER 7-8)
CERTIFIED 1IM

Base
Available two types of base:
1. in die cast aluminium from 700 mm., "Boch" [as standard]
2. 4 cone shaped chrome legs
3. 4 spokes swivel Rovere or moka Base

Castors
Double tread with 65mm diameter, standard or rubber , they can be free [as standard] or with brake.

Elevation
All Quinti gas columns are compliant to DIN 4550 norm and exceed the 4th level.

Mechanisms
M1 Aluminium Synchron Self allows the synchronized back and seta inclination adjustment with shock proof system, lockable in 4 different positions. Seat and backrest height adjustment.

M14 Black Aluminium Synchron allows the synchronised back and seat inclination adjustment with shock proof system, lockable in 4 different positions. Seat and backrest height adjustment.

Armrests
The armchair is characterised by polyurethanic foamed upholstered armrests.
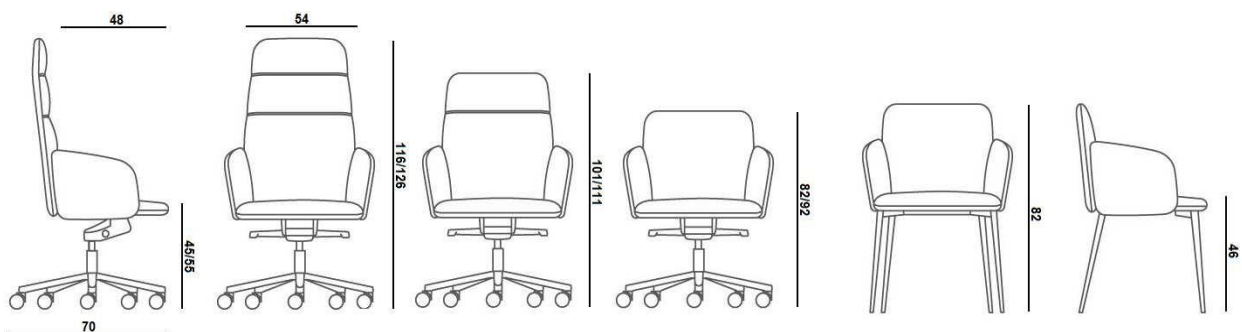
Seat & backrest
Seat and backrest are entirely foamed. In the lumbar part two straps guarantee a better comfort.
Three heights of backrest are available, high, medium, low.

DIMENSIONS

HANAMI Design Archirivolto

Quinti®

COATINGS

BIO-EXPO
CATEGORY 2
300 gr/mt2
100% Propitex FR batteriosattico
Classe 1UNI EN ISO 354:2003
100.000 +/- 10% cicli Maltindale

EXTREME
CATEGORIA 2
350 gr/mtl
100% Xtreme FR
Classe , EN 1021-1/2
100.000 +/- 10% cicli Maltindale

LASER
CATEGORY 2
560 gr/mtl
100% Poliestere FR
Classe 1
80.000+/- 10% cicli Maltindale

ECOPELLE
CATEGORY 2
630 gr/mt2
83% PVC, 17% Syntetic
ISO 379-DIN75200-CSERF4/83 10%
cicli Maltindale

ERA
CATEGORY 3
448 gr/mtl
100% Trevira CS
Classe 1UNI EN ISO 354:2003
100.000 +/- 10% cicli Maltindale

LASER PLUS
CATEGORY 3
630 gr/mtl
100% Poliestere FR Trevira
Classe1 , 4.000 +/- cicli Maltindale

ECOPELLE SOUL
CATEGORY 3
760 gr/mt2
Superficie 100% POLIURETANO,
Base Poliestere 85%,17% Cotone
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

MELANGE
CATEGORY 3
390 g/lin.m
100% Trevira CS
Classe 1
80.000 +/- 10% cicli Maltindale

JET
CATEGORY 3
365+/- 5% g/lin.m
100% Poliestere FR
Classe 1
80.000+/- 10% cicli Maltindale

ECOPELLE SISTEMA PRO
CATEGORIA 3
710 gr/mt2
Superficie 93% PVC
Base Poliestere 28%
CLASSE1
100.000 CICLI

LANA
CATEGORY 5
500 gr/mt2
75% Lana, 25% poliammide
Classe 1
100.000 cicli Maltindale

PELLE
CATEGORY 5/6
620 g/lin.m
100% Pelle bovina
Classe 1, EN 1021-1/2

PIED POULE
CATEGORY 6
550 g/lin.m
66% cotone, 34% Poliestere
35.000 % cicli Maltindale

EUROPOST 2
CATEGORY 6
710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASSE1emme,UNI9175/FA
50.000% cicli Maltindale

MERIT
CATEGORY 7
500g/lin.m
76% Poliestere Recycled
24% Poliestere
EN 1021-1/2
85.000 % cicli Maltindale

PREMIUM /ELEGANCE
CATEGORY 7
100% Pelle bovina Primo fiore
Spessore 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO
CATEGORY 7
770 g/lin.m
90% New woolworsted, 10% Nylon
Classe 1, EN 1021-1/2
100.000 % cicli Maltindale

REMIX
CATEGORY 7
415 g/lin.m
90% New woolworsted, 10% Nylon
Classe 1, EN 1021-1/2
100.000 % cicli Maltindale

VELLUTO DECONTRACTE'
CATEGORY 7
590 g/lin.m
19% CO, 61% PC,10% PL, 10%VI
40.000 % cicli Maltindale

VELLUTO
CATEGORY 8
600 g/lin.m
100.000 % PL Flameretardant

PELLE SOFT
CATEGORY 8
100% Pelle bovina SPESSORE1,8-2 mm
Primo fiore CONCIA ALL'ANILINA
EN1021-1/2

HANAMI Design Archirivolto

Quinti®

USAGE AND MAINTENANCE

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials with which are made, some simple cares are necessary.

TISSUES
Cleaning: check the advice for the maintenance and the washing reported in the card tissue of the file colors. Usage: it is recommended to pay attention to the usage as the tissues can be torn or cut

LEATHERS
Cleaning: clean with a white wet cloth soaked in just water. Use products with high quality for the cleaning of the leather following carefully the instructions of the producer's cleaning product. In doubt, try out the product on a part hidden from view to check the result, and wait at least 24 hours for the possible occurrence of problems. Usage: remember the leather is a delicate material therefore special care must be taken during the application.

WOODS
Cleaning: clean with a wet and soft cloth soaked in warm water. Always dry up after the cleaning. Remove immediately any liquid material or others residue to avoid the absorption. Usage: wooden surfaces, because of being a natural material, could suffer in the long-term from alterations of color caused by the use and the exposition to light. Remember that wood cannot bear direct sources of heat on the surface.

METALS
Cleaning: both metallic surfaces in steel or aluminium, and painted surfaces, must be cleaned with a wet and soft cloth soaked in hot water. For stubborn strains it is possible to dilute in liquid neutral soap's water with moderation. Always dry up after the cleaning with a soft cloth or deerskin. Do not use creams and pastries to clean the steel, do not use chlorine, do not use bleach or others aggressive detergents. It is not recommended to use abrasive pastries, steel wool and sponges that can scratch metallic surfaces. Usage: pay attention to food stains such as coffee, coke, fruit juices that can leave indelible marks on surfaces.

WARRANTY
QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to costumize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.