INCLASS

Ontvang Uw Exclusieve Aanbieding!

We vermelden hier geen korting, maar die willen wij u wel graag geven. Daarvoor hebben wij uw gegevens nodig. Vul hier het **contactformulier** in en ontvang direct uw aanbieding van ons.

Inclass meubelen. Vraag hier om een aanbieding - offerte.

In de showrooms hebben wij alle stoffen en kleur opties voor de Inclass Meubelen beschikbaar.

Neem contact met ons op voor een bezoek en vrijblijvend advies, zodat wij voldoende tijd voor u reserveren.

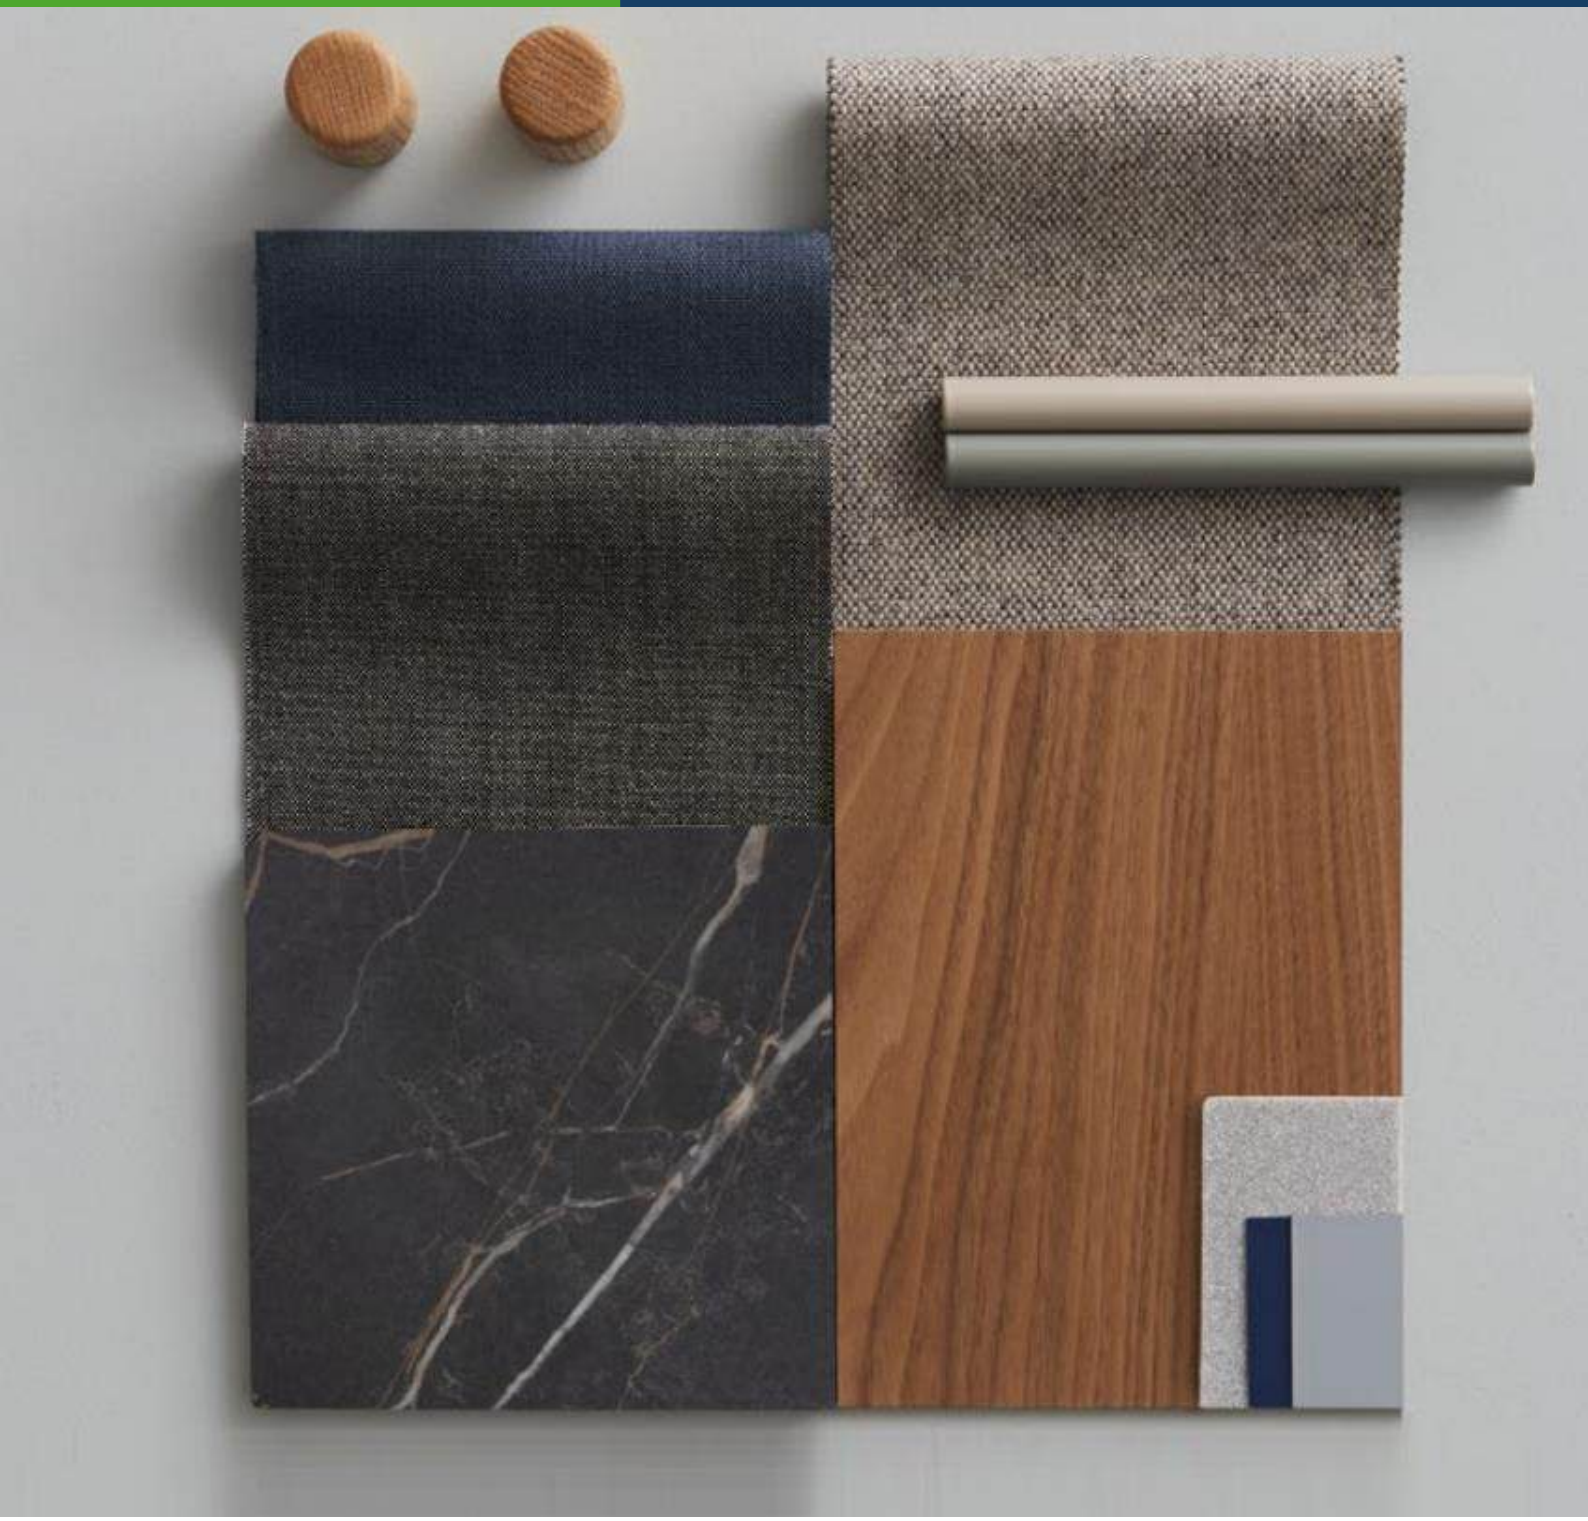

Jan. 2025.

meinema
interieur | ontwerp | uitvoering
Info@meinema.nl
0031 - 20 311 8396

We consider the colours and materials as means to express ideas and create emotions as they have the capacity to influence our feelings, perceptions and wellness.

This sample book wants to serve as a tool to inspire, communicate and reproduce colours, helping the end user to make their colour ideas come true based on our suggestions.

COLOURS CAN DEFINE OUR WORLD AND CONNECT US WITH THE ENVIRONMENT.

COLOURS & FINISHES

ESSENTIAL ELEMENTS TO EXPRESS A MESSAGE AND CREATE AN ENVIRONMENT.

The extense INCLASS finishes book offers a broad range of materials, finishes and colours.
The infinite combinations of materials, colours and textures allow to effectively express the message, the intention and the desired atmosphere for each project.

INDEX

1. SUGGESTIONS OF COMBINATIONS 9

2. FINISHES 31

Upholstery
Metal Paint
Wood
Polypropylene
Rotomolded polyethylene
Table tops

3. CARE AND MAINTENANCE 141

1.

SUGGESTIONS OF COMBINATIONS

URBAN, SIENA, NATURAL, EARTH, CASUAL

URBAN

Elegant, modern, relaxed or dynamic atmosphere. Positive attitude, feeling of calm and security.

INCLASS

SIENA

Raw, velvety and intense tones that embellish and fill the space with subtle elegance.

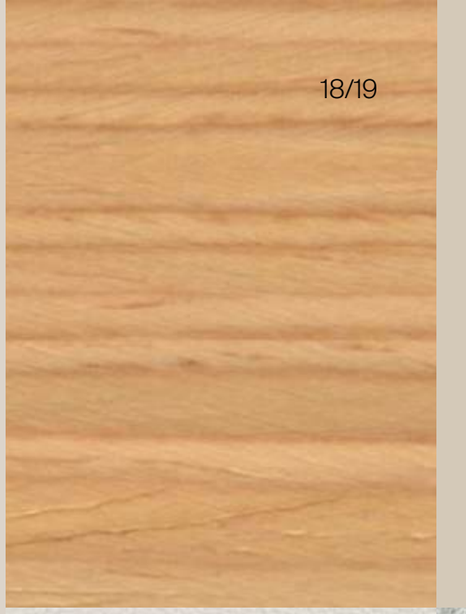

NATURAL

Refined, natural and ecological with a slightly warm nuance that transmits peace and tranquility.

FINISHES

BOOK

EARTH

Connection with nature, holistic and harmonious lifestyle. Sober, cosy and timeless colours.

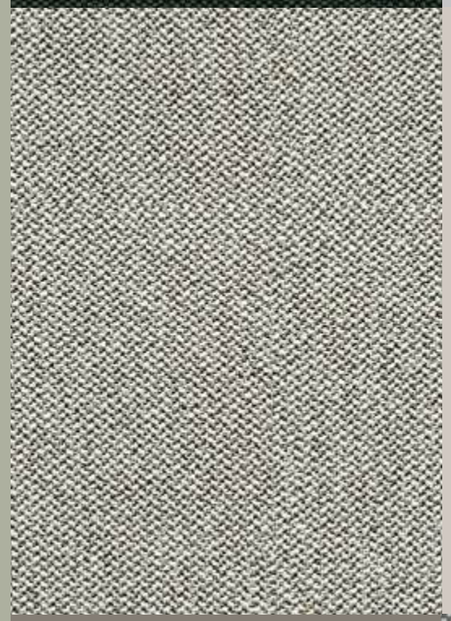

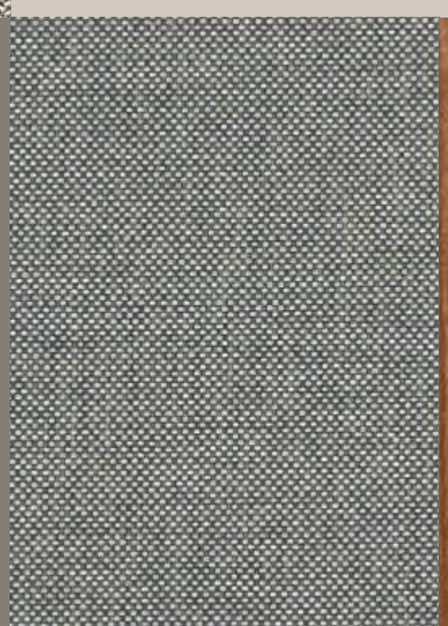

FINISHES

BOOK

CASUAL

Quiet, relaxed environments away from noise and excesive pretensions.

INCLASS

2. FINISHES

2.1. UPHOLSTERY MATERIALS 34

Matrix by collections 38
G1 - Asis 40
G2 - Netex 42
G2 - Jordan 44
G2 - Nel 46
G2 - Ars 48
G2 - Pixel 50
G2 - Cora 52
G2 - Hilton 54
G2 - Addo 56
G3 - Apta 58
G3 - Cura 60
G3 - Iber 62
G3 - Calma 64
G3 - Rivet 66
G3 - Era 68
G3 - Medley 70
G4 - Maxi 72
G4 - Velvet mesh 74
G4 - Main Line Flax 76
G4 - Connect 78
G4 - Valencia 80
G4 - Step 82
G5 - Dolce 84
G5 - Synergy 86
G5 - Remix 88
G5 - Canvas 90
G6 - Steelcut Trio 92
G6 - Fiord 94
G7 - Hallingdal 96
G10 - Piel 98
G11 - Piel 100

2.2. METAL PAINT & FINISHES 102

Matrix by collections 104
Sample card 106

2.3. WOOD 108

Matrix by collections 110
Veneer / Solid wood 112
Lacquered colours 114

2.4. POLYPROPYLENE 116

Matrix by collections 118
PP1 colours for monoshells 120
PP1 colours for bases 122

2.5. ROTOMOLDED POLYETHYLENE 124

Polyethylene colours 126
Lacquered polyethylene colours 128

2.6. TABLE TOPS 130

Matrix by collections 132
Wood veneer tops 134
Lacquered tops 136
Miscellaneous materials 138

UPHOLSTERY FABRICS & LEATHERS

All our upholstered products are locally handcrafted, making each piece unique.

The fabrics and leathers are priced by grades identified by an alpha numerical code: G1/G2/G3/G4/G5/G6/G7/G10/G11/G12

Upon approval, INCLASS products can be upholstered in customer's own fabrics (COM) or in customer's own leathers COL. Not all customer's materials are valid to upholster our products. They must be validated and approved by the INCLASS upholstery department.

- COM textiles will be priced as Grade 2.
- COL leathers will be priced as Grade 3.

All our fabrics and leathers may be purchased separately upon request. Consult our Customer Service for pricing.

The fabrics with stripes or patterns will be applied vertically unless customer specifies other way.
To guarantee a good finish, in some models, a backing must be added to some of the fabrics.
INCLASS offers a broad and selected range of upholsteries produced by top-level companies.

The maintenance, cleaning recommendations and technical data are the ones supplied by the producer for each collection.
Leather is a natural raw material with a non-uniform surface. The leather may show marks such as grain, wrinkles, veins and differences in colour or tone from one batch to another.
The samples in the finishes book are not to be considered a guarantee of perfect homogeneity between the sample and the real supply.

Items upholstered in light colours, especially white, make stains more visible and in many cases such as the dyes of garments impossible to remove. INCLASS shall not accept any liability for these kinds of stains.

UPHOLSTERY FABRICS & LEATHERS

COM/COL service

The Customer's Own Material (COM) and Customer's Own Leather (COL) services offers the opportunity for customers to have an INCLASS bespoke product with textiles or leathers especially selected by the customer.
Prior to order placement, if the COM/COL is not found in the INCLASS database of approved fabrics and leathers, a sample cutting of the required COM/COL must be submitted for approval.
If COM has stripes or patterns, the sample should be large enough to show the entire design of the fabric. Customer must identify the name and number of units on which the COM/ COL is to be applied.

Once approved, you can place your order. As soon as we receive and check COM/COL in our factory, our customer service will inform you about the production and delivery schedule.

Even after preliminary approval, INCLASS reserves the right to reject COM/COL if necessary when the quality is not satisfactory for the item it is intended to be used on. Even after preliminary approval, INCLASS assumes no responsibility for its overall appearance, durability or any other quality aspect, after being upholstered on our products. Subject to a specific agreements, INCLASS may buy for the customer the COM/COL materials.

COM/COL requirements

Each COM/COL must be identified as follows to prevent order delays or material losses:

- Customer name and purchase order number.
- Clearly indicate the item to which COM/COL is to be applied
- The name of the fabric supplier. Supplier's fabric name with number and colour.

The COM requirements are based on 1,4 meter width plain material. In some models, the quantity of material needed can be optimized by increasing the units ordered. For this reason, our product sheets indicate the quantities required for orders from 1 to 7 units and for orders of more than 8 units. If you need a more accurate calculation, contact our Customer Service. If the fabric has a design that requires specific positioning or pattern matching, our Customer Service should be consulted for additional material requirement. On these type of fabrics an upcharge will be applied.

COL hides must be sent well packed and rolled in a neat manner avoiding creases and roll marks. The leathers can be rejected if are sent in a folded manner.
To determine COL quantity, see COL requirements for each product. Leather is a natural product with a non-uniform surface due to grain, wrinkles, veins and may present differences in tone from one batch to another. For this reason all square meter requirements are estimations. (COL) Square meter requirements are based on hides with an average size of 4-5 m2 of clean usable leather. If the COL has a smaller average hide size, please consult our Customer Service. The usable surface and the shape of the COL hides supplied can make it necessary for us to request more leather after COL is received.

Excess COM/COL will not be returned with the shipment of furniture and will be disposed of after order is completed unless prior arrangements have been made with our Customer Service.

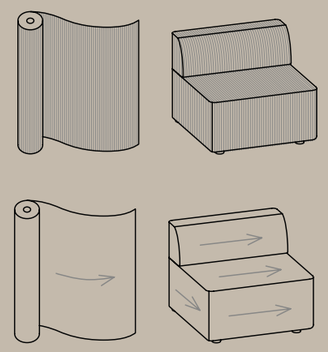

Cutting Direction Guidelines

Cutting direction is based on the fabric width and the way the fabric is cut from the roll and applied to products. The INCLASS Upholstered products usually use the vertical direction. The vertical direction is understood as the direction of the unrolling, leaving the selvages on the right and left sides. The fabric is applied as shown in the illustration.

UPHOLSTERY MATRIX BY COLLECTIONS

LEGEND

- – Not available
- • Available
- ○ See specifications

	ALTEA	ANN	ARC	ARUM	ARYN	ARYN MAX	ARYN WOOD	BINAR 60	BINAR EXECUTIVE	DIVIDERS / SCREENS	DUNAS LOUNGE	DUNAS XL	DUNAS XS	ENTROPY	ESCALAS	ESITT	EXA	ITEK PRO	KERN	KORI	LAPSE	LEA	LIN TAPIZ	LIN WOOD	MARCUS	NIM	ORUS	PAU	PLANIA BENCH	REVER	SUN	TAIA	TAO	TETRIS 2.0	UNNIA	UNNIA TAPIZ	VARYA	VARYA TAPIZ	VARYA WOOD	VARYA XL	WUDI	XAIL	ZENPRO
FABRICS & LEATHERS																																											
G1 - Asis	•	•	•	•	•	•	•	•	•	•	•	•	•	–	•	•	•	•	•	•	•	•	•	•	–	•	•	•	•	•	•	•	•	•	•	•	•	•	•	–	•	•
G2 - Netex	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•	•	•	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
G2 - Jordan *new*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G2 - Nel *new*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G2 - Ars	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G2 - Pixel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G2 - Cora	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G2 - Hilton	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G2 - Addo	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Apta *new*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Cura *new*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Iber *new*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Calma	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Rivet	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Era	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G3 - Medley	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G4 - Maxi	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
G4 - Velvet Mesh	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•	•	•	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
G4 - Main Line Flax	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G4 - Connect	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G4 - Valencia	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G4 - Step *new*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G5 - Dolce	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G5 - Synergy	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G5 - Remix	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G5 - Canvas	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G6 - SteelCut Trio	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G6 - Fiord	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G7 - Hallingdal	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
G10 - Piel	•	•	•	•	•	•	•	•	•	–	•	•	•	○	○	•	•	•	○	•	•	•	•	•	•	•	•	○	•	•	•	•	•	○	•	•	•	•	•	•	•	•	•
G11 - Piel	•	•	•	•	•	•	•	•	•	–	•	•	•	○	○	•	•	•	○	•	•	•	•	•	•	•	•	○	•	•	•	•	•	○	•	•	•	•	•	•	•	•	•

G1 - ASIS

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
5 - 6, ISO 105 B02, Method 2.
Abrasion:
100.000 Martindale EN ISO 12947-2.
Resistance to pilling:
4 - 5, ISO 12945-2.
Rubbing fastness in humid state:
4, ISO 105-X12.
Rubbing solvents:
4, ISO 105-X12.
Tear strength:
Warp 140N.
Weft 110N, EN ISO 13937-3.
Flammability:
EN 1021 - 1/2.
BS 5852 0.
BS 7176 Low Hazard.
CAL TB 117 Section 1.
NFPA 260 Class 1.
Regulation nº 118 UNECE Annexed 6.
IMO MSC.307 (88) Annexed I Part 8.

Width: 140cm
Weight: 335gr/m²

***Batch to batch variations may occur within commercial tolerances.

198

315

88

122

4011

422

77


47

292

86


4


5

26

132


170


108

9

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G2 - NETEX

3D MESH

TECHNICAL DATA

Composition:
PES 100%.
Lightfastness:
4 - 5, ISO 105-B02.
Abrasion:
45.000 Martindale, EN ISO 12947-2.
Breaking strength:
Wrap N 620.
Weft N 1.200, EN ISO 13934-1.
Resistance to pilling:
5, EN ISO 12945-2.
Colour fastness to perspiration:
Acid 5
Alkaline 5, UNE-EN ISO 105-E04.
Flammability:
CA TB 117
EN ISO 1021 1 Cigarette.

Width: ±160cm
Weight: ±300gr/m²

***Batch to batch variations may occur within commercial tolerances.

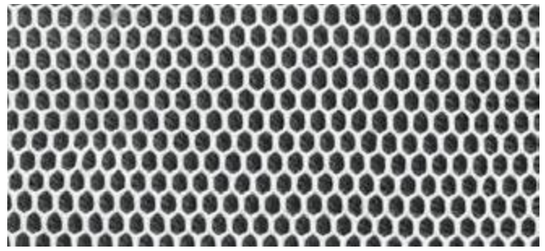
201

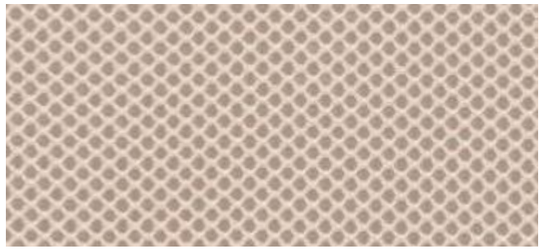
213

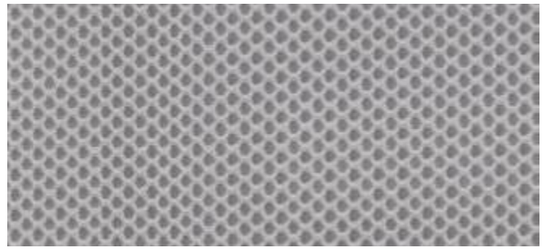
227

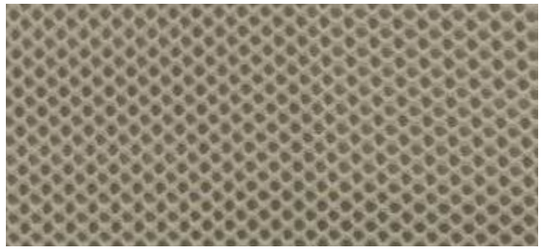
210

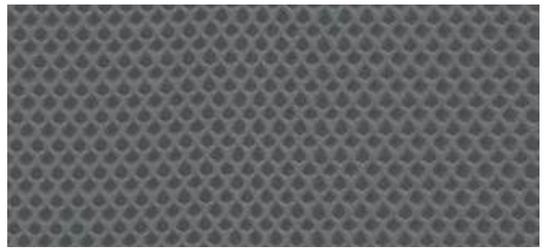
231

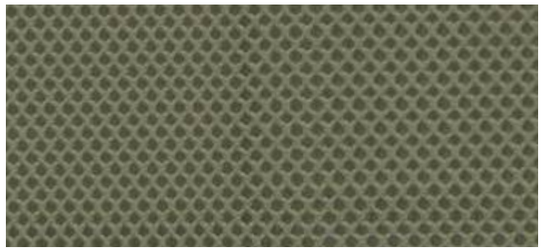
263

234

242

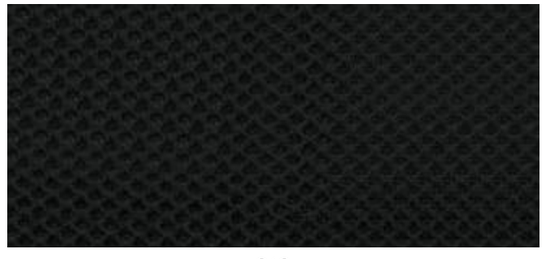
212

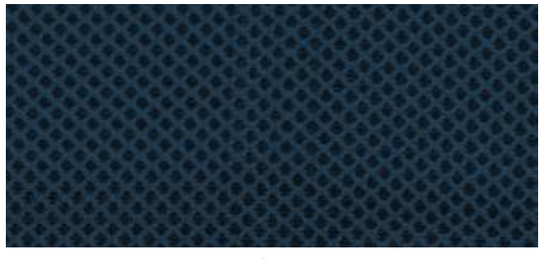
211

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G2 - JORDAN NEW

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
5, ISO 105 B02.
Abrasion:
100.000 Martindale EN ISO 12947-1, 2.
Resistance to pilling:
4 - 5, ISO 12945-2.
Fastness to rubbing:
Wet 5.
Dry 5, ISO 105-X12.
Tear strength:
Warp 180, 2N.
Weft 174, 3N, EN ISO 13937-3.
Seam slippage:
Warp 1,6N.
Weft 2,0N, EN ISO 13936-2.
Tensile strength::
Warp 1257N.
Weft 1189N, EN ISO 13934-1.

Width: ±146cm
Weight: ±360gr/m²

***Batch to batch variations may occur within commercial tolerances.

1

9

8

3

4

5

6


15

10

11

18


16


12

13


19

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G2 - NEL NEW

TECHNICAL DATA

Composition:
95% PES, 5% cotton.
Light fastness:
5 - 6, UNE 40187 - BS1006-B2.
Abrasion:
>38.000 Martindale EN ISO 12947-2.
Resistance to pilling:
4 - 5, ISO 12945-1.
Rubbing fastness in humid state:
4 - 5, ISO 105-D01.
Rubbing solvents:
4 - 5, ISO 105-D01.
Tear strength:
Warp 2mm.
Wet 2,1mm, EN ISO 13937-2.
Characteristics:
Instalimp® treatment.

Width: ±140cm
Weight: ±445gr/m²

***Batch to batch variations may occur within commercial tolerances.

INSTALIMP® TREATMENT

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

21

10

12

15

1

3


50


6

80

7

70

9


19


29


90

G2 - ARS

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
5, ISO 105 B02, Method 2.
Abrasion:
90.000 Martindale EN ISO 12947-2.
Resistance to pilling:
4 - 5, ISO 12945-2.
Rubbing fastness in humid state:
5, ISO 105-X12.
Rubbing solvents:
4 - 5, ISO 105-X12.
Seam strength:
Warp 3,7mm.
Weft 4,0mm, EN ISO 13936-2.
Seam strength:
Warp 75,6N.
Weft 65,1N, EN ISO 13937-3.
Flammability:
EN 1021 - 1 (cigarette).
Environment:
OEKO-TEX® Standard 100.

Width: 140cm
Weight: 250gr/m²

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
15.HTR.60135 HOHENSTEIN HTTI
Tested for harmful substances.
www.oeko-tex.com/standard100

REACH COMPLIANCE

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

90


74

27

59

68

45

35


75


79

87

88


98


99

G2 - PIXEL

TECHNICAL DATA

Composition:
100% polyolefin.
Light fastness:
5 - 6, UNE-EN ISO 105-B02. Method 2.
Abrasion:
40.000 Martindale EN ISO 12947-2.
Resistance to pilling:
4 - 5, UNE-EN 12945-2.
Dye fastness to rubbing:
Wet 4 - 5.
Dry 4 - 5, UNE-EN ISO 105-X12.
Tear Resistance:
Warp 120N.
Weft 130N UNE-EN ISO 13937-3.
Flammability:
EN 1021-1 (cigarette)
BS 5852-0 (cigarette)
CAL TB 117 Section 1.
NFPA 260 Clase 1.

Width: 140cm
Weight: 255gr/m²

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
15.HTR.60135 HOHENSTEIN HTTI
Tested for harmful substances.
www.oeko-tex.com/standard100

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

12 3 90

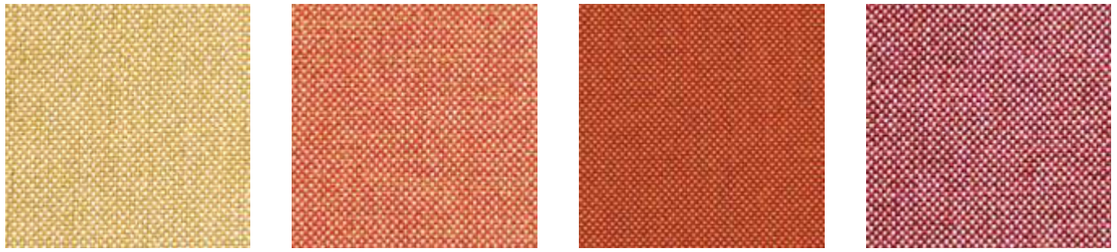
50 53 62 54

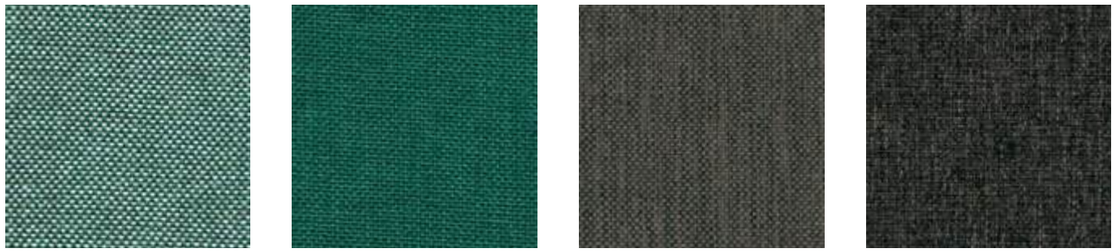
101 102 41 43

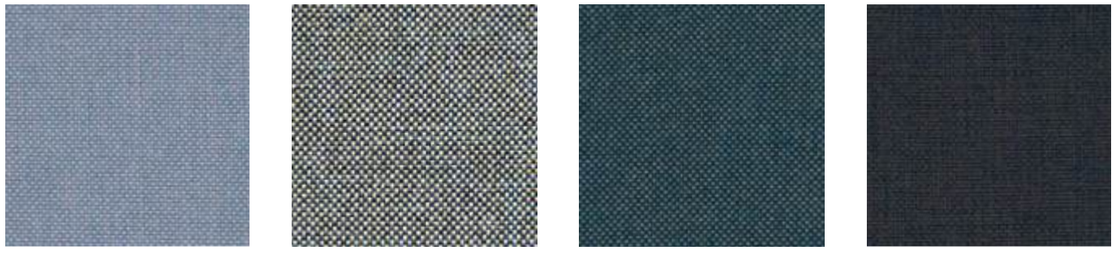
84 71 78 247

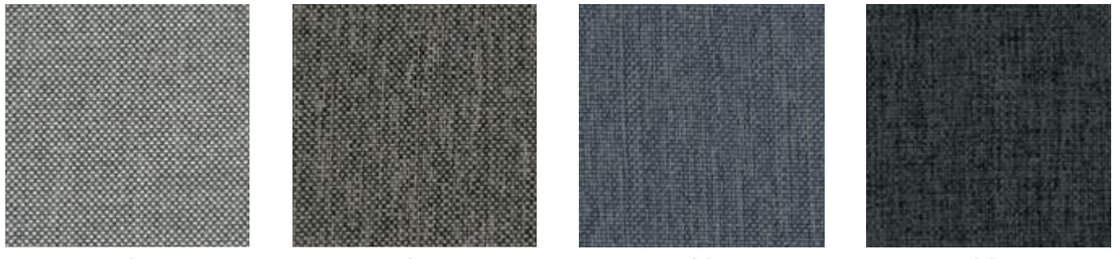
19 21 29 801

G2 - CORA

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
5 EN ISO 105-B02, Method 2.
Abrasion:
83.000 Martindale EN ISO 12947-1, 2.
Resistance to pilling:
4, EN ISO 12945-2.
Rubbing fastness in humid state:
5, ISO 105-X12.
Rubbing solvents:
5, ISO 105-X12.
Seam strength:
Warp 2,5mm.
Weft 3,7mm, ISO 13936-2.
Tear strength:
Warp exceed 154,2N.
Weft exceed 112,3N, EN ISO 13937-3.

Width: 140cm
Weight: 330gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

21

40

32

60

12

14

115

27


17

18

37

38


3

65


20

2

G2 - HILTON

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
4, ISO 105 B02.
Abrasion:
>25.000 Martindale ISO 12947-2.
Resistance to pilling:
4 - 5, ISO 12945-2.
Tear strength:
Warp 63N.
Weft 63N, ISO13937-3.
Dye fastness to rubbing:
Wet 4 - 5. Dry 4 - 5, ISO 105X12.

Width: 140cm
Weight: 380gr/m²

***Batch to batch variations may occur within commercial tolerances.

Anti Stain

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

6

4

2

18

8

9

17

10

11

12

16

13

14

1

G2 - ADDO

TECHNICAL DATA

Composition:
80% polyester, 20% cotton.
Light fastness:
5, ISO 105 B02, Method 2.
Abrasion:
40.000 Martindale ISO 12947-1, 2.
Resistance to pilling:
4, ISO 12945-2.
Rubbing fastness in humid state:
3, ISO 105-X12.
Rubbing solvents:
4 - 5, ISO 105-X12.
Seam strength:
Warp 3mm.
Weft 2mm, ISO 13936-2.
Tear strength:
Warp exceed 175,1N.
Weft exceed 120,7N, EN ISO 13937-3.
Flammability:
EN 1021 - 1 (cigarette).

Width: 140cm
Weight: 365gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G3 - APTA NEW

TECHNICAL DATA

Composition:
71% polyester, 18% modacrylic, 8% recycled cotton, 3% polyamide.
Light fastness:
4 - 5, ISO 105 B02.
Abrasion:
60.000 Martindale ISO 12947.
Resistance to pilling:
5, ISO 12945-2.
Fastness to rubbing:
4 - 5, ISO 105-X12.
Tensile strength:
>350N, ISO 13934-1.
Tear strength:
>20N, BS 4303.
>3N, DIN 53859-5.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 5852 (cigarette).
Environment:
Oeko-Tex® standard 100.
Characteristics:
Anti-stain protection.
Antibacterial and virus protection protection.

Width: ±140cm
Weight:

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100 15.HTR.60135 HOHENSTEIN HTTI tested for harmful substances. oeko-tex.com/standard100

PFC FREE

aqua clean TECHNOLOGY

SAFEFRONT

8% recycled material
Recycled Cotton

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

62

625

156

266

618

324

80

111

43

336

13

271

339

602

11

60


15

G3 - CURA NEW

By Gabriel

TECHNICAL DATA

Composition:
98% recycled polyester, 2% polyester.
Light fastness:
5 - 8, ISO 105 B02.
Abrasion:
100.000 Martindale ISO 12947-2.
Resistance to pilling:
4 - 5, ISO 12945-2.
Fastness to rubbing:
Wet 4 - 5.
Dry 4 - 5, ISO 105-X12.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
CA TB 117-2013.
ASTM E 84 Class 1.
Environment:
Oeko-Tex® standard 100.
Complies with EU Ecolabel.

Width: ±140cm
Weight: ±420gr/m²

40° shrinkage max. 1%

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100 15.HTR.60135 HOHENSTEIN HTTI
ested for harmful substances.
oe o tex com/standard100

EU Ecolabel www.ecolabel.eu

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.


60000

61232


68262

62083

64013


60112

68181

61257


64196


60110

68261

64195

61169

65105


66170

66166

60999

G3 - IBER NEW

TECHNICAL DATA

Composition:
69% PES, 30% cotton, 1% polyamide.
Light fastness:
4 - 5, ISO 105 B02.
Abrasion:
70.000 Martindale ISO 12947 - BS 2543.
Resistance to pilling:
4 - 5, ISO 12945-2.
Fastness to rubbing:
Wet 4 - 5.
Dry 4.
Seam spliagge:
Warp <3mm.
Weft <4mm.
Flammability:
BS 5852 Part 1.
Environment:
Oeko-Tex® standard 100.

Width: ±140cm
Weight: ±570gr/m²

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
15.HTR.60135 HOHENSTEIN HTTI
ested for harmful substances.
oe o tex com/standard100

70%
recycled material
Recycled
Cotton

stain stop& clean

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

01

09

10

14

18

19

04

55

38

07

37


91


90

G3 - CALMA

TECHNICAL DATA

Composition:
Topcoat: 70% Vinyl, 30% P.U.
Backing: 100% Microfiber Polyester.
Light fastness:
>4.
Abrasion:
>100.000 Martindale.
Breaking strength:
Warp >180N.
Weft >330N, ISO 1421.
Tear strength:
Warp >25N/cm.
Weft >28N/cm, ISO 4674-1.
Flex Bally:
>100.000 cycles.

Width: 140cm.
Weight: 853gr/m².

***Batch to batch variations may occur within commercial tolerances.

407

415

425

477

412

411

421

401

418

419

423

470

475

469

490

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G3 - RIVET

By Camira

TECHNICAL DATA

Composition:
100% REPREVE® recycled polyester.
Light fastness:
6, EN ISO 105-B02, Method 3.
Abrasion:
≥80.000 Martindale EN ISO 12947-2.
Fastness to rubbing:
Wet 4.
Dry 4, ISO 105 X12.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
UNI 9175 Class 1 IM.
Environment:
Complies with EU Ecolabel.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 280gr/m²

***Batch to batch variations may occur within commercial tolerances.

100%
recycled material
Post Consumer
Recycled
Polyester

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

26

10

14

09

36


11


21


27


24


34


48


50


37

G3 - ERA

By Camira

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
5, EN ISO 105 B02.
Abrasion:
≥100.000 Martindale EN ISO 12947.
Fastness to rubbing:
Wet 4.
Dry 4, ISO 105 X12.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
EN 13501-1 Adhered Class B, s1, d0.
EN 13501-1 Un-adhered Class C, s1, d0.
Environment:
OEKO-TEX® Standard 100.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 320gr/m^2

Ⓟ

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
15.HTR.60135 HOHENSTEIN HTTI
Tested for harmful substances.
www.oeko-tex.com/standard100

CERTIFIED
INDOOR AIR QUALITY
INDOOR ADVANTAGE GOLD
FURNITURE

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

19

3


27

26

29

16

34

1

2


45

11

13

21


46


39

40

14

G3 - MEDLEY

By Gabriel

TECHNICAL DATA

Composition:
100% polyester.
Light fastness:
5 - 7, EN ISO 105 B02.
Abrasion:
75.000 Martindale EN ISO 12947-2.
Resistance to pilling:
4, EN ISO 12945-2.
Fastness to rubbing:
Wet 4 - 5.
Dry 4 - 5, ISO 105 X12.
Flammability:
BS EN 1021 1&2 Cigarette and Match.
BS EN 1021-1 Cigarette.
BS 5852 Part 1 0,1 Cigarette and Match.
BS 476 Part 7, class 2.
Class Uno UNI 9174 - UNI 8457.
ÖNORM B 3825-B2-3800-Q1 UK.
CA TB 117.
ASTM E 84.
Environment:
Oeko-Tex® standard 100
100% free of heavy metals.

Width: 140cm
Weight: 510gr/m²

60° shrinkage max. 1%

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
15.HTR.60135 HOHENSTEIN HTTI
Tested for harmful substances.
www.oeko-tex.com/standard100

No heavy metals · No heavy metals · No heavy metals

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

65011

62054

61003

67002

68005

63064

64019

63016

63063

66008



67006

66010

61004

60003

60167

60004

60999

G4 - MAXI

3D MESH

TECHNICAL DATA

Composition:
100% recyclable polyamide.
Lightfastness:
≥5, ISO 105-B02.
Abrasion:
50.000 Martindale, EN ISO 12947-2.
Breaking strength:
Warp N 990 ±5%.
Weft N 439 ±5%, EN ISO 13934-1.
Resistance to pilling:
≥4/5, EN ISO 12945-2.
Dye fastness to rubbing:
≥4/5, UNE-EN ISO 105-X12.

Widht: ±140cm
Weight: ±550gr/m²

***Batch to batch variations may occur within commercial tolerances.

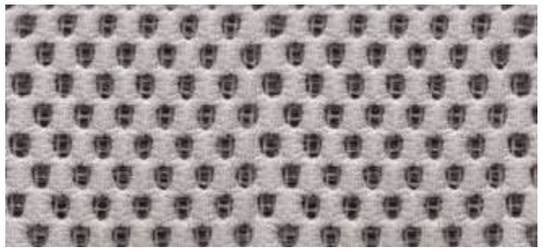

418

423

405

409

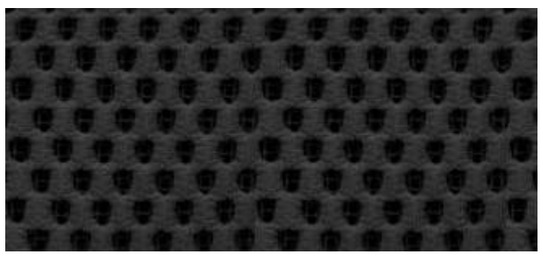

406

402

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G4 - VELVET MESH

TECHNICAL DATA

Composition:
60% PA - 40% PL
Light fastness:
6 - Tolerance 5 to 8.
(Blue scale) - Xenotest
UNI EN ISO 105-B02.
Abrasion:
120.000 Martindale, EN ISO 12947-2.
Resistance to pilling:
5 - Tolerance 4 to 5. EN ISO 12945-2.
Dye fastness to rubbing:
4/5 - Tolerance 4 to 5. UNE-EN ISO 105-X12.
Inflamability:
UNE EN 1021-1.
CAL TB 117.
*Flammability performance is dependent on foam and glue used.

Widht: ±140cm
Weight: ±260gr/m²

***Batch to batch variations may occur within commercial tolerances.

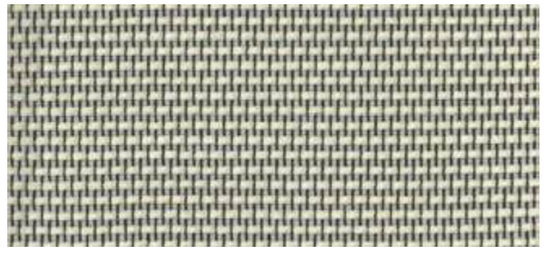
1069

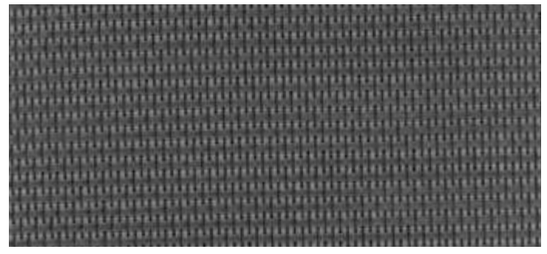
8007

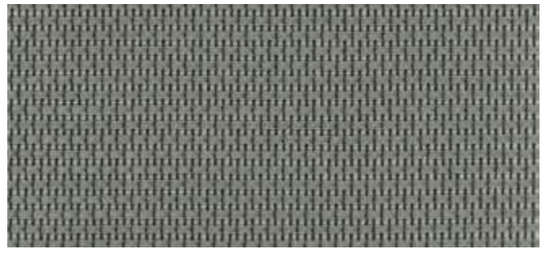
8027

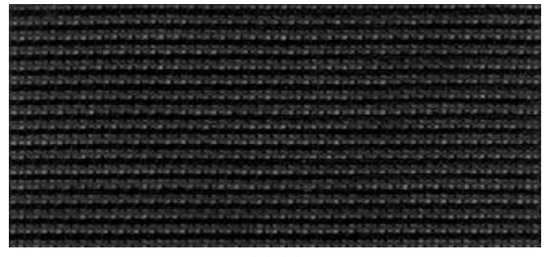
8033

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G4 - MAIN LINE FLAX

By Camira

TECHNICAL DATA

Composition:
75% virgin wool, 25% flax.
Light fastness:
5, ISO 105 B02.
Abrasion:
≥50.000 Martindale EN ISO 12947-2:1999.
Resistance to pilling:
4 - 5, ISO 12945-2.
Fastness to rubbing:
Wet 3.
Dry 4, ISO 105 X12.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
BS 5852 Ignition source 5.
BS 7176 Medium Hazard.
NF D 60-013.
ÖNORM B 3825 & A 3800-1.
UNI 9175 Class 1 IM.
BS 5867-2: Type B Curtains & Drapes.
IMO FTP Code (Part 8).
Environment:
Complies with EU Ecolabel.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 437gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G4 - CONNECT

By Gabriel

TECHNICAL DATA

Composition:
48% wool, 41% recycled polyester, 9% polyamide, 2% polyester.
Light fastness:
5 - 7, ISO 105 B02.
Abrasion:
90,000 Martindale EN ISO 12947-2.
Resistance to pilling:
4 - 5, ISO 12945-2.
Fastness to rubbing:
Wet 4 - 5.
Dry 4 - 5, ISO 105 X12.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 5852 Crib 5.
CA TB 117-2013.
Class Uno UNI 9175 Class 1 I EMME.
Environment:
Oeko-Tex® standard 100.
Complies with EU Ecolabel.

Width: 140cm
Weight: 370gr/m²

***Batch to batch variations may occur within commercial tolerances.

OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100 15.HTR.60135 HOHENSTEIN HTTI Tested for harmful substances. www.oeko-tex.com/standard100

EU Ecolabel www.ecolabel.eu

41% recycled material
Post Consumer Recycled Polyester

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

60147

61208

68229

62109

63107

64229

64230

67113

67115

61209

61210

66205


65127

60152


60999

G4 - VALENCIA

By Spradling

TECHNICAL DATA

Composition:
Topcoat: 100% Vinyl.
Backing: 100% Polyester Hi-Loft^{2TM}.
Light fastness:
1000 hours, XENOTEST DIN 54004/NTC 1479.
Abrasion:
300.000 cycles de Martindale EN ISO 12947 Part 2.
Cold crack resistance:
-23°C.
Characteristics:
Antimicrobial protection.
Anibacterial protection.
Antimycotic protection.
Flammability:
EU: EN 1021 Part 1 y 2.
ES: UNE 23.727-90 1R/M.2.
FR: NF P 92-503/M2.
DE: DIN 4102 B2.
IT: UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME).
AT: ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten.
AT: ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend.
IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2.
US: FMVSS 302.
US: FAR 25/853.
(MED) Marine Equipment Directive.
ECE R118.02 (replaces Directive 95/28/CE) Annexes 6, 7 & 8.
EN 71-2:2006+A1:2007 - Toy safety - Parte 2: Inflamability.

Width: 140cm
Weight: 685gr/m^2

***Batch to batch variations may occur within commercial tolerances.

Anti Stain

PERMABLOK® ADVANCED VINYL PROTECTION

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

2117

0002

2114

2111

2116

0035

2074

2110

4002

4001

5065

4040

4045

4003


2108

8032

4044

4041

9035

G4 - STEP NEW

By Gabriel

TECHNICAL DATA

Composition:
100% trevira CS.
Light fastness:
5 - 7, ISO 105 B02.
Abrasion:
100.000 Martindale EN ISO 12947.
Resistance to pilling:
4 - 5, ISO 12945-2.
Fastness to rubbing:
Wet 4 - 5. - Dry 4 - 5, ISO 105 X12.
Flammability:
IMO MSC 307(88) Annex 1 part 8.
MED.
Certificate IMO.
DIN 4102 B1.
NFP 92-503/504/505 M1.
BS EN 1021 1&2 Cigarette and Match.
BS EN 1021-1 Cigarette.
BS 5852 Part 1 0,1 Cigarette and Match.
BS 5852 Crib 5.
ÖNORM B 3825-B1-3800-Q1 UK.
FAR/JAR 25.853 (a) (i) (ii).
BS 7176 Medium hazard.
AM 18 - NF D 60-013-(only for fabric).
CA TB 117-2013.
Class Uno UNI 9175 Class 1 I EMME.
DIN EN 13501-1 B-s1,d0.
Environment:
Oeko-Tex - EU Ecolabel - 100% free of heavy metals.

Width: 140cm
Weight: 470gr/m²

60° shrinkage max. 3%

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

2442 - 64159


2440 - 62057

2543 - 68301

2442 - 68165

2440 - 68165

2440 - 61149

2441 - 60004

2441 - 67004

2440 - 60004


2440 - 60011

2442 - 60011

2442 - 66152

2440 - 66764

2440 - 60090

2442 - 61103

2442 - 60021

2440 - 60999

2440 - 68121

G5 - DOLCE

By Spradling

TECHNICAL DATA

Composition:
Topcoat: 100% polyurethane.
Backing: 100% rayon.
Light fastness:
40 hours, XENOTEST DIN 54004/NTC 1479.
Abrasion:
≥300.000 Martindale EN ISO 12947 Part 2.
Cold crack resistance:
-23ºC.
Characteristics:
Antibacterial protection.
Flammability:
EU: EN 1021 Part 1 y 2
US: FMVSS 302
UK: BS 5852 Part 2 CRIB 5
IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2.

Width: 140cm
Weight: 685gr/m²

***Batch to batch variations may occur within commercial tolerances.

6703

6706

6708

6719

6714

6709

6711

6712

6717

6729

6726

6727

6736

6735

6734

6724

6728

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

G5 - SYNERGY

By Camira

TECHNICAL DATA

Composition:
95% virgin wool, 5% polyamide.
Light fastness:
5, ISO 105-B02.
Abrasion:
≥100.000 Martindale EN ISO 12947.
Fastness to rubbing:
Wet 4.
Dry 4, ISO 105 X12.
Flammability:
EN 1021 - 1 (cigarette).
EN 1021 - 2 (match).
BS 7176 Low Hazard.
NF D 60-013.
ÖNORM B 3825 & A 3800-1 (sobre 58kg/m^3 Foam CMHR).
UNI 9175 Classe 1 IM.
EN 13501-1 Adhered Class D, s1, d0.
EN 13501-1 Un-adhered Class E, s2, d0.
IMO FTP Code (Part 8).
Environment:
Complies with EU Ecolabel.
Certificate Indoor Advantage™ Gold.

Width: 140cm
Weight: 400gr/m^2

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

74

45

43

73

84

32

22

37

34

49

59


62

41

8


16

17


27

G5 - REMIX

By Kvadrat

TECHNICAL DATA

Designer:
Giulio Ridolfo.
Composition:
90% new wool, 10% nylon.
Light fastness:
5 - 7, ISO 105-B02.
Abrasion:
100.000 Martindale EN ISO 12947.
Resistance to pilling:
4, EN ISO 12945.
Flammability:
AS/NZS 1530.3.
BS 5852 part 1.
EN 1021-1/2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117-2013.
Environment:
Complies with EU ecolabel “The Flower”.
100% free of heavy metals.

Width: 140cm
Weight: 415gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

136

433

452

346

653

326

933

152

356

733

743

266

773

123

143

163

183

G5 - CANVAS

By Kvadrat

TECHNICAL DATA

Designer:
Giulio Ridolfo.
Composition:
90% new wool, 10% nylon.
Light fastness:
5 - 7, ISO 105-B02.
Abrasion:
100.000 Martindale EN ISO 12947.
Resistance to pilling:
4 - 5, EN ISO 12945.
Flammability:
AS/NZS 1530.3.
BS 5852 Crib 5 when flameprotected.
BS 5852, ignition source 3.
BS 5852 part 1.
DIN 4102 B2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117-2013.
Environment:
Complies with EU ecolabel “The Flower”.
100% free of heavy metals.

Width: 140cm
Weight: 480gr/m².

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

124

244


614

654

954

964

454

424

264

364

684

794

174

G6 - STEELCUT TRIO

By Kvadrat

TECHNICAL DATA

Designer:
Frans Dijkmeijer and Giulio Ridolfo.
Composition:
90% new wool, 10% nylon.
Light fastness:
5 - 7 ISO 105-B02.
Abrasion:
100.000 Martindale EN ISO 12947.
Resistance to pilling:
4, EN ISO 12945.
Flammability:
AS/NZS 1530.3
AS/NZS 3837 class 2.
BS 5852 part 1.
DIN 4102 B2.
EN 1021-1/2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117-2013.
Environment:
Complies with EU ecolabel “The Flower”.
100% free of heavy metals.

Width: 140cm
Weight: 770gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.


806

105

205

515


453

113


133

236

476


124


916


253

645


716

883

796

383

G6 - FIORD

By Kvadrat

TECHNICAL DATA

Designer:
Louise Sigvardt & Tone Barnung.
Composition:
92% new wool, 8% nylon.
Light fastness:
5 - 7, ISO 105-B02.
Abrasion:
60.000 Martindale EN ISO 12947.
Resistance to pilling:
4 - 5, EN ISO 12945.
Flammability:
AS/NZS 3837 class 2.
ASTM E84 Class A Adhered.
ASTM E84 Class A Unadhered.
BS 5852 part 1.
EN 1021-1/2.
IMO FTP Code 2010:Part 8.
NF D 60 013.
NFPA 260
ÖNORM B1/Q1
UNI 9175 1IM.
US Cal. Bull. 117-2013.
Environment:
Complies with EU ecolabel “The Flower”
100% free of heavy metals.

Width: 140cm
Weight: 500gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.


271


151

121

251

451

751

551

951

371

771

591

961

191

G7 - HALLINGDAL

By Kvadrat

TECHNICAL DATA

Designer:
Nanna Ditzel.
Composition:
70% new wool, 30% viscose.
Light fastness:
5 - 7 ISO 105-B02.
Abrasion:
100.000 Martindale EN ISO 12947.
Resistance to pilling:
3, EN ISO 12945.
Flammability:
AS/NZS 1530.3.
AS/NZS 3837.
BS 5852 Crib 5.
BS5852 part 1.
DIN 4102 B2.
EN 1021-1/2.
IMO FTP Code 2010: Part 8.
NF D 60 013.
NFPA 260.
Önorm B1/Q1.
UNI 9175 1IM.
US Cal. Bull. 117 – 2013.
Environment:
Complies with EU ecolabel “The Flower”.

Width: 140cm
Weight: 795gr/m²

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request real fabric samples before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

687

200

407

420

227

100


123

130


368


110


116


126

180


733

773


968

376

G10 - LEATHER

TECHNICAL DATA

Composition:
Cow leather.
Light fastness:
≥4/5, UNI EN ISO 105B02.
Fastness to rubbing:
Wet ≥4 (150 cycles).
Dry ≥4 (500 cycles).
Perspiration ≥4 (80 cycles), UNI EN ISO 11640 - 11641 (pH8).
Tear strength:
>20N, EN ISO 3377-1.
Determination of PH:
>3,5, EN ISO 4045.
Adhesion of the finish:
≥2, UNI EN ISO 11644.
Determination of dry ex resistance:
Without damage, UNI EN ISO 5402.
Flammability:
Ignition source 0 (cigarette).
Ignition source 1 (match).
BS 5852-1979.
BS EN 1021-1-2.
Thickness:
0,9 - 1,1mm
Average surface:
4,8 - 5,0m^2
Maintenance:
Wash with neutral soap and water or with a cleaning product for leather.

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request a real leather sample before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

207

214

218

224

201

216

203

219

208

209

204

G11 - LEATHER

TECHNICAL DATA

Composition:
Cow leather.
Light fastness:
≥5, UNI EN ISO 105B02.
Fastness to rubbing:
Wet ≥4 (80 cycles).
Dry ≥4 (500 cycles).
Perspiration ≥4 (50 cycles), UNI EN ISO 11640 - 11641.
Tear strength:
≥20N, EN ISO 3377-1.
Determination of PH:
≥3,5 ≤0,7 EN ISO 4045.
Adhesion of the finish:
≥2,5N / 10mm, UNI EN ISO 11644.
Determination of dry flex resistance:
>50.000 cycles, UNI EN ISO 5402-1.
Flammability:
Ignition source 0 (cigarette)
Ignition source 1 (match), BS 5852-1:79.
Thickness:
0,9 - 1,1mm
Average surface:
4,8 - 5,0m^2
Maintenance:
Wash with neutral soap and water or with a cleaning product for leather.

***Batch to batch variations may occur within commercial tolerances.

Note:
- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request a real leather sample before ordering.
- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

333

348

346

320

331

332

344

324

362

375

326

317

321

325

328

311


322

357

358

METAL PAINT & FINISHES

INCLASS powder coats all painted metal components for a durable finish eliminating VOC's (volatile organic compounds) from being released into the environment. The result is a finish that is abrasion and impact resistant.

We offer a wide palette of metal finishes that are priced by grades. M1 colours, M2 colours and chrome.

METAL PAINT MATRIX BY COLLECTION

LEGEND

- – Not available
- • Available
- ○ See specifications

	ALTEA	ANN	ARC	ARUM	ARYN	ARYN MAX	ARYN WOOD	BINAR 60	BINAR EXECUTIVE	DIVIDERS / SCREENS	DUNAS LOUNGE	DUNAS XL	DUNAS XS	ELIX	ENTROPY	ESCALAS	ESITT	FLAT	ITEK PRO	KORI	LAMINAR	LAN	LAPSE	LEA	LEX	LIN TAPIZ	LIN WOOD	MALIBU	MARCUS	MILLENIUM	MOON	NIM	NUME	PAU	PLANIA BENCH	PLANIA TABLE	REVER	SUI	SUN	TAIA	TAO	TEN	TETRIS	UNNIA	UNNIA TAPIZ	VARYA	VARYA TAPIZ	VARYA WOOD	VARYA XL	XAIL
METAL FINISHES																																																		
M1 Colours	•	•	•	•	•	•	•	•	○	•	•	•	•	•	•	•	○	•	○	○	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	○	•	•	•	•	•	•	•	•	•	•	•	•	•
M2 Colours	•	•	•	•	•	•	•	○	–	○	•	•	•	•	•	•	–	•	–	–	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	–	•	•	•	•	•	•	•	•	•	•	•	•	•
Chrome	•	•	•	•	•	•	•	○	–	–	–	○	•	–	–	–	–	•	–	–	–	–	–	–	–	–	•	–	•	•	–	•	•	•	•	•	–	•	•	•	•	•	•	•	•	•	•	•	–

METAL

SAMPLE CARD

CHROME



M1 COLOURS

B00

Aluminum



W01

COLORES M2

M56

V92

B40

B36

M38

V74

B44

G49

Y62

M44

M82

P70

Rust Brown

Rust Grey

G42

WOOD

VENEER / PAINTED WOOD

VENEER / SOLID WOOD

Due to natural variations of the wood, finished products may vary from samples in colour, texture, and grain.
Wood parts may contain knots or grain patterns of different tones and are not homogeneous. This may lead to variations from one piece to another.

The wooden parts will darken and change tone with age and exposure to light.

All veneer and solid wood parts are finished with post-catalysed wood coatings, which provide exceptional durability and resistance.

PAINTED WOOD

All painted wood parts are finished with post-catalysed wood coatings with a process of three layers. This process provides exceptional durability and resistance.

BESPOKE WOOD FINISHES

Upon approval and with an upcharge, bespoke wood finishes are available. Contact our Customer Service for pricing and lead times.

Prior to approval, customer will send a sample for matching at least 6x6cm in surface dimension. Once received in our factory and approved, INCLASS will produce a matching sample following acknowledgement of the order. INCLASS will schedule the order for production only when the sample has been approved by the Customer.

Pantone® or RAL colour matches do not require approval and sample matching, but it may be requested by the Customers at a cost to be agreed with our Customer Service.

INCLASS may ask for payments in advance on bespoke finishes.

WOOD MATRIX BY COLLECTION

LEGEND

- – Not available
- ● Available
- ○ See specifications

WOOD FINISHES	ALTEA	ANN	ARC	ARYN WOOD	BINAR 60	DUNAS XL	DUNAS XS	ESCALAS	LAPSE	LEA	LIN WOOD	NIM	PAU	PLANIA BENCH	PLANIA TABLE	REVER	STIKS	SUN	TAIA	TAO	UNNIA	UNNIA TAPIZ	VARYA	VARYA TAPIZ	VARYA WOOD	VARYA XL	WUDI	XAIL
Beech	–	●	●	–	–	–	–	–	–	–	●	●	●	–	–	–	–	–	–	●	–	–	–	–	○	–	–	–
Oak	●	●	●	●	●	●	●	●	●	●	●	●	–	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Walnut	–	●	●	●	–	–	–	●	–	●	–	–	–	●	●	●	–	●	–	●	–	–	–	–	○	–	–	–
W1 Colours	–	●	●	–	–	–	–	–	–	–	–	●	●	–	–	–	●	●	–	●	–	–	–	–	–	–	–	–
W2 Colours	–	●	●	–	–	–	–	–	–	–	–	●	●	–	–	–	●	●	–	●	–	–	–	–	–	–	–	–

WOOD

VENEER / SOLID WOOD

BEECH

Natural Stain

Walnut Stain

Wenge Stain

OAK

Natural Stain

Walnut Stain

Wenge Stain

Black Stain

WALNUT

Natural Stain

WOOD

LACQUERED COLOURS

W2 COLOURS

W1 COLOURS

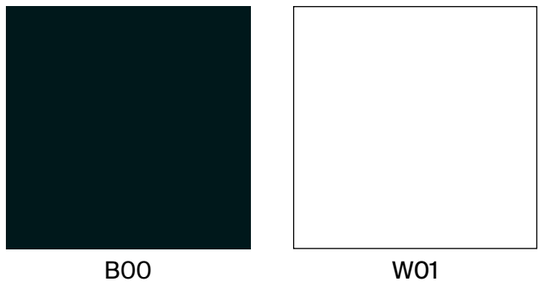

POLYPROPYLENE

PP1 COLOURS

POLYPROPYLENE MATRIX BY COLLECTION

LEGEND

- – Not available
- • Available
- ○ See specifications

	ALTEA	ANN	ARC	ARUM	ARYN	ARYN MAX	ARYN WOOD	DIVIDERS / SCREENS	DUNAS LOUNGE	DUNAS XL	DUNAS XS	ELIX	ENTROPY	ESCALAS	ESITT	ESSENS	FLAT	ITEK PRO	KORI	LAMINAR	LAN	LAPSE	LEA	LEX	LIN TAPIZ	LIN WOOD	MALIBU	MARCUS	MOON	NIM	NUME	PAU	PLANIA BENCH	PLANIA TABLE	STELLA	STIKS	SUI	SUN	TAIA	TAO	TETRIS 2.0	UNNIA	UNNIA TAPIZ	VARYA	VARYA TAPIZ	VARYA WOOD	VARYA XL	WUDI	XAIL
POLYPROPYLENE FINISHES																																																	
PP1 Colours	–	–	–	•	•	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•	–	–	•	–	•	–	–	•	–	–

POLYPROPYLENE

PP1 COLOURS FOR MONOSHELLS

M56

M38

B40

V16

B36

B44

B00

G42

Y62

P70

W01



ECOPLAS®
100% recycled polypropylene

V92

M44

V74

M82

G49

POLYPROPYLENE

PP1 COLOURS FOR BASES

ROTOMOLDED POLYETHYLENE

Rotomolded polyethylene items are suitable for indoor and outdoor use.

Composed polyethylene colours may present surface irregularities that are intrinsic to these type of finishes. INCLASS will not accept returns due to this

Painted polyethylene colours are available in matt or gloss finish.
Customer must specify.

Upon approval, the bases can also be painted with any of the RAL colours in matt or gloss finish. Contact Customer Service for lead time.

Upon approval other bespoke colours are also available. Contact our Customer Service for pricing and lead time.

ROTOMOLDED POLYETHYLENE

ROTOMOLDED POLYETHYLENE

POLYETHYLENE COLOURS

PE1 STANDARD COLOURS

G49 Anthracite

G42 Grey

M82 Stone

B00* Black



W01 White

***B00 black** colour 100% recycled material

PE2 COMPOSED COLOURS

Rust Brown

Concrete

ROTOMOLDED POLYETHYLENE

LACQUERED POLYETHYLENE COLOURS

PE3 STANDARD PAINTED COLOURS

M56

B40

B36

B00

M38


V74


B44

G49


Y62


P70

M82

G42


W01

PE4 METALLIC PAINTED COLOURS

Silver

Gold


Copper

PE5 BESPOKE PAINTED COLOURS

OPTIONALLY they can be finished in all the colours of the RAL sample card, both in gloss and matt.

*100% recycled material
**Standard in matt finish. Optionally available in gloss finish.

TABLE TOPS

TABLETOPS MATRIX BY COLLECTIONS

LEGEND

– Not available
● Available
○ See specifications

TABLETOPS FINISHES	ANN	ARC	DUNAS LOUNGE	DUNAS XL	ELIX	ENTROPY	ESCALAS	ESSENS	FLAT	LAMINAR	LAN	LAPSE	LEX	MALIBU	MOON	NIM	NUME	PAU	PLANIA BENCH	PLANIA TABLE	STIKS	SUI	TETRIS	UNNIA	UNNIA TAPIZ	VARYA	VARYA TAPIZ	VARYA WOOD	VARYA XL	WUDI
Beech	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Oak	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	–	–	–	–	–	●
Walnut	–	–	–	–	–	●	●	●	–	●	–	–	–	–	●	–	–	–	●	●	–	●	–	–	–	–	–	–	–	–
W1 colours	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	●	●	●	●	●	●	●	●	●	●	–
W2 colours	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	–	●	●	●	●	●	●	●	●	●	●	–
Solid Fenix®	–	●	–	–	●	–	–	●	●	●	●	–	●	●	●	–	●	–	●	●	–	●	–	–	–	–	–	–	–	–
Solid HPL, black core	–	●	–	–	●	–	–	●	●	●	–	–	●	●	●	–	●	–	●	●	–	●	–	–	–	–	–	–	–	–
Solid HPL, white core	–	●	–	–	●	–	–	●	●	●	–	–	●	●	●	–	●	–	–	●	–	–	–	–	–	–	–	–	–	–
Melamine	–	–	–	–	●	–	–	–	●	●	–	–	●	●	–	–	–	–	–	–	–	●	–	–	–	–	–	–	–	–

TABLETOPS

WOOD VENEER

MDF core with natural wood surface.

BEECH

Natural Stain

Walnut Stain

Wenge Stain

OAK

Natural Stain

Walnut Stain

Wenge Stain

Black Stain

WALNUT

Natural Stain

TABLETOPS

LACQUERED MDF

W2 COLOURS

W1 COLOURS

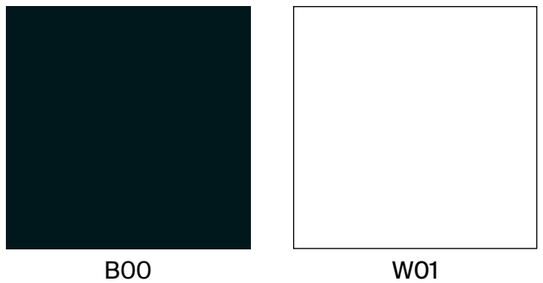

TABLETOPS

MISCELLANEOUS MATERIALS

SOLID HPL
12mm black core

Black



White

MELAMINE
MDF core



White

Oak

SOLID FENIX®
12mm black core

Black

SOLID HPL
12mm white core



White

SOLID HPL
12mm sand core

Sand

FENIX® LAMINATE

Grigio Bromo
0724

Verde Comodoro
0750

Beige Arizona
0748

SOLID HPL STONES
12mm

Dark brown Samas
3482

Light brown Pulpis
3447



White Olimpo
3493

3.

CARE AND MAINTENANCE

CARE AND MAINTENANCE

METALLIC STRUCTURES

Cleaning can be done with a non-abrasive cloth and one of the following products:
- Neutral soap, moistening the cloth and drying after cleaning.
- Using a solution of 50% water and 50% alcohol.
- With a specific product for metals.

Limescale marks on chrome may be removed by using a 30% vinegar and water solution or with specific cleaning products for chromed surfaces. Dry thoroughly with a dry non abrasive cloth once cleaned.

*Remark: do not use sponges, fabrics or abrasive objects under any circumstances. Strong, acidic or alkaline cleaners can damage painted metallic surfaces. It is very important to prevent this.

PLASTICS

Plastic surfaces can be cleaned with a non-abrasive cloth, warm water and neutral soap. Alternatively, you may use a solution of 50% water and 50% alcohol or specific cleaning products for plastic surfaces.

UPHOLSTERY

INCLASS offers a broad range of upholstery materials produced by renowned manufacturers.

To clean upholstered furniture, the gentlest product to use is warm water and neutral soap. This method is suitable for all types of fabrics, leathers, and faux leathers.

FABRICS

We recommend cleaning with warm water and neutral soap. To wipe down by hand, use a clean non abrasive cloth, wring well and be careful not to get the upholstery too wet so that moisture does not get into the foam..

Other methods:
- Ethanol-based disinfectants can be used on polyester fabrics without causing damages on the textile or changes in colour. The concentration should be around 75%.
  *Remark: the colour and texture of wool fabrics in some cases could be affected with this method.
- Chlorine-based detergents can also be used on polyester, but it should be avoided on wool fabrics. Concentration should be 1000-1200ppm.

NATURAL LEATHER

We recommend cleaning with a soft sponge or cloth moistened with warm water and neutral soap. Do not wet it excessively. Dry with a cloth once you have finished cleaning.

FAUX LEATHER

We recommend cleaning with a non-abrasive cloth or soft sponge dampened with warm water and neutral soap. Dry thoroughly with a cloth once you have finished cleaning. Avoid harsh detergents as they may cause hydrolysis and surface deterioration.

Please consult the technical data, maintenance and cleaning recommendations indicated by the manufacturers of each fabric in our finishes book for more information.

*Remark: Injection extraction cleaners and steamers should be avoided, as they may reactivate the adhesive. If you choose to use them, make sure the furniture is not manipulated during 24h so the adhesive can dry completely and the upholstery is not in risk of showing indents.

*Remark: INCLASS accepts no liability for users' stains or transfer of garment dyes to the furniture's fabric. This may occur especially with white or light coloured fabrics.

WOODEN SURFACES

LACQUERED MDF OR OAK AND WALNUT VENEER

First of all, dust should be removed with a soft cloth or microfibre cloth, avoiding accumulations that could scratch the surface.

For deeper cleanning, we recommend cleaning the surface with a non-abrasive cloth, warm water and neutral soap. Once finished cleaning, we recommend that you dry the surface thoroughly. Alternatively, you may use specific cleaning products for wood surfaces.

FENIX® & HPL
We recommend cleaning the surface with a non-abrasive cloth, warm water and neutral soap. After cleaning, we recommend drying the surface thoroughly.

Non-abrasive household cleaners or solvents can also be used. If the residues are old or hardened, use a magic eraser or soft cloth to remove them. After using the solvent, we recommend washing with warm water and detergent, always making sure to remove all traces of detergent to avoid drying stains.

In case of micro-scratches on FENIX® surfaces, follow the instructions below:
- Place a damp paper towel on the area where the micro-scratches can be seen.
- Apply heat to the surface to be repaired. Do not leave the iron on the part of the surface for more than 10 seconds.
- Rinse the repaired area with warm water and a microfibre cloth.

Maintenance recommendations:
- The surface should never be treated with products containing abrasive substances, micro-abrasive sponges or unsuitable tools such as sandpaper or scouring pads.
- Acids or very alkaline products should be avoided.
- Strong bleaches or chlorine bleaches should be avoided as they may damage the surface. Use sodium hypochlorite in a concentration of less than 5% for a maximum of 5 minutes and then rinse with a sponge or towel.
- Hydrogen peroxide in a concentration of less than 3% should be rinsed carefully. It is recommended to avoid contact for more than 10 minutes for concentrations above 3%, the surface should be thoroughly rinsed with a dry, non-abrasive sponge.
- When solvents are used, the cloth used must be perfectly clean so that it does not leave marks on the surface. However, any marks can be removed by rinsing with hot water and drying.
- Do not use furniture polish or wax-based cleaners in general, as they tend to form a sticky film on the dense surface of FENIX®, to which dirt adheres.
- Do not use metal spatulas, iron brushes or other metal tools to remove stains, paint, plaster or any other substance.

***Remark:** to keep wooden furniture in the best condition, keep it away from water, excess of humidity, intense heat and direct exposure to the sun's rays.

GLIDES

With continued use, the glides of the structures wear out. We recommend periodically checking its status. If they are worn, they must be replaced to avoid damage to the floor. INCLASS products fit standard plastic glides suitable for a wide variety of floor types. As an option, we offer the possibility of equipping your furniture with special glides for specific types of floors. If you have any questions, please ask our Customer Service department to find out the right type of glide suitable for your floor.

CASTERS

With the use, dust and debris may accumulate on your chair casters leading to premature loss of mobility and performance. A regular cleaning and maintenance are needed to prolong the right function of your chair casters.

DISINFECTION

Due to the COVID 19 pandemic, many people wonder how to properly clean their furniture to prevent and avoid the transmission of the virus without damaging its surface materials. In order to inform you, INCLASS has published a disinfection guide with useful tips to disinfect the different surfaces of your furniture. You can consult our disinfection guide in the following Link.