

Ontvang uw exclusieve aanbieding.

Contact

Narbutas Fono akoestische bureauscherm

narbutas



Other documents available for this product

NARBUTAS product care guide

Screens, desks, and fittings compatibility guide

Quality standard

LST EN ISO 354:2004

LST EN ISO 20189

EN 1023-1:1996

EN 1023-2:2000

EN 1023-3:2000

10 year Warranty

See Warranty statement



Technical information

Types

- Quadrangle acoustic side screen (1)
- Acoustic front screen (2)
- Acoustic front screen for MOTION bench desk (3)

Screen

- 40 mm solid wood frame;
- 40 mm rock wool;
- Covered in felt;
- Upholstered with fabric.

Screen fittings

Clamp fittings (1)

- 4 mm metal sheet;
- Powder-coated metal;
- PA plastic knob (black only);
- Suitable for desktops with a thickness ranging from 14-27 mm;
- Attached to the screen using screws.

Fixed-height fittings (2)

- 2 mm metal sheet;
- Powder-coated metal;
- Attached to the screen and desktop using wood screws.

Fittings for MOTION bench desk (3)

- 4 mm metal sheet;
- Powder-coated metal;
- Attached to the desk frame with screws and inserted into fittings.

1



2




3





Range


Side screens




Front screens

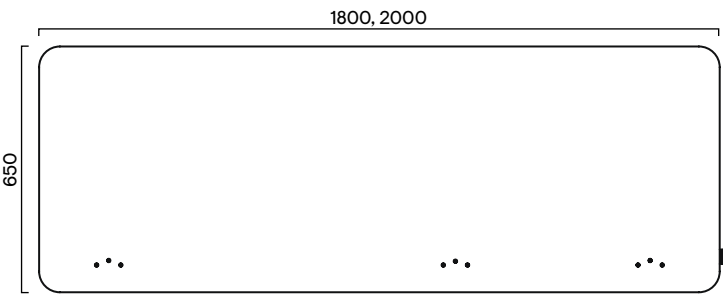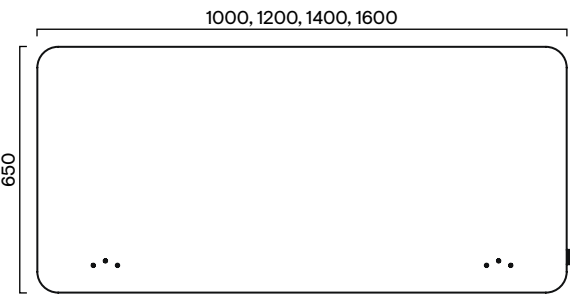


Front screens for MOTION bench desk

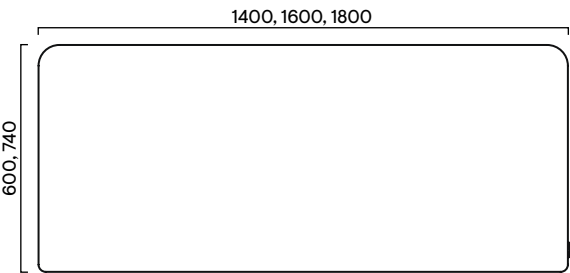


Clamp fittings

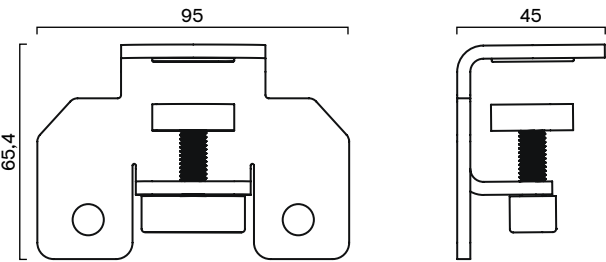

Fixed-height fittings

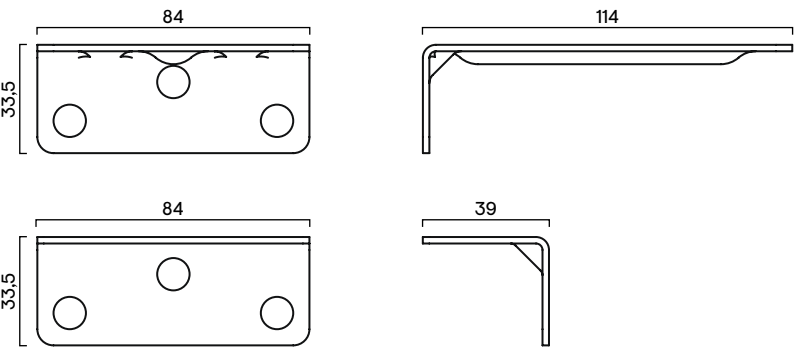

Fittings for MOTION bench desk

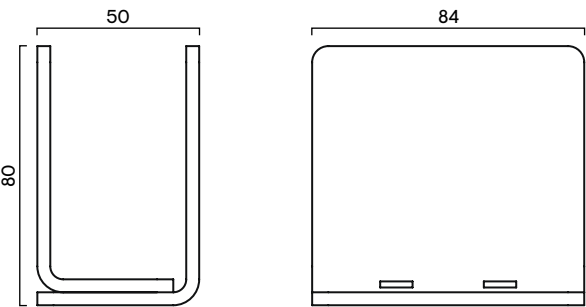

Additional information

- Screen fittings must be ordered separately based on specific requirements.
- When ordering a screen for the MOTION 2-desk bench without ordering a central cable tray (G9A0014, G9A0015 or G9A0016), metal fittings G4F0024 must be ordered.
- Screens can be pinned using pins.
- In case of uncertainty regarding screen compatibility with desk systems, the compatibility guide provides detailed information on compatible screens and the required fittings.