NOVA U desks

Lees meer info op onze website **www.meinema.nl**

H 740

L 1200; 1400; 1600; 1800
W 700; 800

L 1200; 1400
W 600

L 2400; 2800; 3200; 3600
W 800

L 1200; 1400; 1600; 1800
W 800

L 1200; 1400; 1600; 1800
W 1440; 1640

L 2400; 2800; 3200; 3600
W 1440; 1640

L 1200; 1400; 1600; 1800
W 1440; 1640

L 1400; 1600; 1800
W 1200

Ø 2810

L 800
W 600

L 600
W 800

L 1440; 1640
W 600

Possibility to extend the length of the 2 or 4 desk bench by ordering supplementary units.
We recommend to connect up to 6 back to back units.

FEATURES

- Easy to assemble and disassemble - “metal to metal” construction
- Just one tool for assembling (DIN911 S5)

QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2003
- All desks meet the requirements of the LST EN 527-3:2003 standard

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- 10 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches – 1440/1640).

Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal, colour matches the legs.

Legs

- Welded metal tube - 40x40 mm;
- Powder coated metal;
- Plastic feet with height levelling (+10 mm).

MATERIALS

- Melamine: P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), M1 (white), N (grey), M1D2 (white with amber oak edges);
- Metal: E (white), M (metallic), T1 (dark grey), A (black).

GUARANTEE

- 5 years

Desktop type

Plain desktop

Desktops with a scallop for wire management

Desktops with a cut-out for grommet and wire management

ORDERING EXAMPLE

Code structure

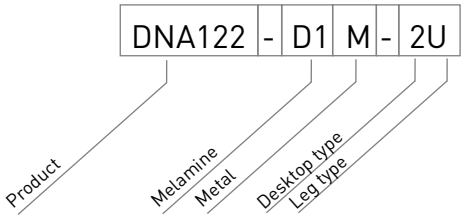

Must be ordered

(for desktop with cut-out)



Metal grommet:
317x119 mm,
H=27 mm

Optional

Power socket blocks

Cable trays

Cable clips



Cable ducts

NOVA A desks

H 740

L 1200; 1400; 1600; 1800
W 700; 800

L 1200; 1400
W 600

L 2400; 2800; 3200; 3600
W 800

L 1200; 1400; 1600; 1800
W 800

L 1200; 1400; 1600; 1800
W 1440; 1640

L 2400; 2800; 3200; 3600
W 1440; 1640

L 1200; 1400; 1600; 1800
W 1440; 1640

L 1400; 1600; 1800
W 1200

L 800
W 600

Possibility to extend the length of the 2 or 4 desk bench by ordering supplementary units.
We recommend to connect up to 6 back to back units.

FEATURES

- Easy to assemble and disassemble - “metal to metal” construction
- Just one tool for assembling (DIN911 S5)

QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2003
- All desks meet the requirements of the LST EN 527-3:2003 standard

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- 10 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches – 1440/1640).

Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal, colour matches the legs.

Legs

- Welded metal tube - 40x40 mm;
- Powder coated metal;
- Plastic feet with height levelling (+10 mm).

MATERIALS

- Melamine: P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), M1 (white), N (grey), M1D2 (white with amber oak edges);
- Metal: E (white), M (metallic), T1 (dark grey), A (black).

GUARANTEE

- 5 years

Desktop type

Plain desktop

Desktops with a scallop for wire management

Desktops with a cut-out for grommet and wire management

ORDERING EXAMPLE

Code structure

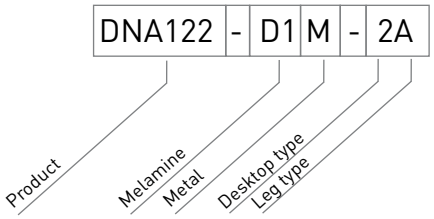

Must be ordered

(for desktop with cut-out)



Metal grommet:
317x119 mm,
H=27 mm

Optional

Power socket blocks

Cable trays

Cable clips



Cable ducts

NOVA meeting and coffee tables

FEATURES

- Easy to assemble and disassemble - “metal to metal” construction
- Just one tool for assembling (DIN911 S5)
- Bolted connections (without screws)

QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2003
- All desks meet the requirements of the LST EN 527-3:2003 standard

TECHNICAL INFORMATION

Tabletop

- 25 mm chipboard covered in wood veneer with 2 mm edging;
- 10 mm gap between the legs and the desktop;
- Desk height - 740 mm;
- Inserts made of 25 mm MFC (melamine) with 2 mm edging.

Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal, colour matches the legs.

Legs

- Welded metal tube - 40x40 mm;
- Powder coated metal;
- Plastic feet with height levelling (+10 mm).

MATERIALS

- Melamine: P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), M1 (white), N (grey), M1D2 (white with amber oak edges);
- Veneer: G (wenge), K (maple), R (walnut);
- Metal: E (white), M (metallic), T1 (dark grey), A (black).

GUARANTEE

- 5 years

RANGE

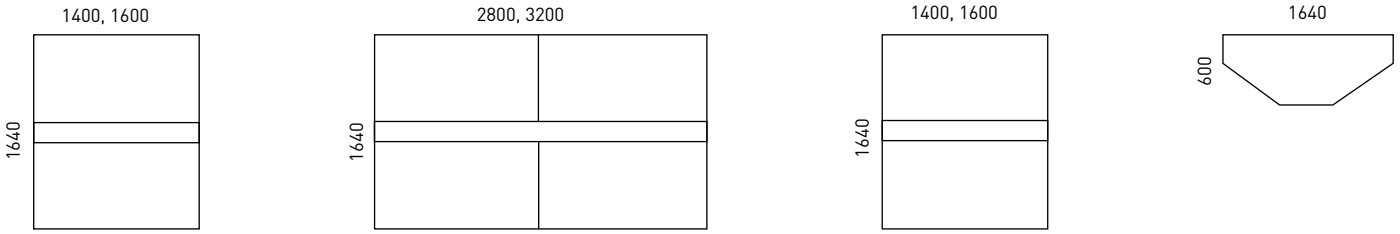

Meeting tables

Supplementary units

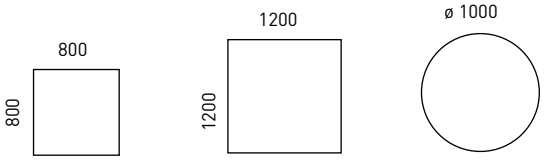



Coffee tables

ORDERING EXAMPLE

Code structure

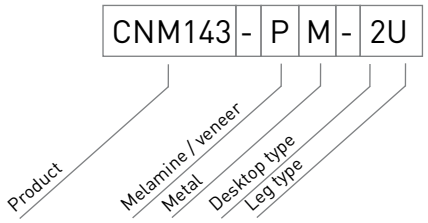

Must be ordered

Inserts

Metal grommet

Optional

Power socket blocks

Cable trays

Cable clips



Cable ducts

NOVA O desks

H 740

L 1200; 1400; 1600; 1800
W 700; 800

L 1200;1400
W 600

L 2400; 2800; 3200; 3600
W 800

L 1200; 1400; 1600; 1800
W 800

L 1200; 1400; 1600; 1800
W 1440; 1640

L 1536; 1336
W 595

L 2400; 2800; 3200; 3600
W 1440; 1640

L 1200; 1400; 1600; 1800
W 1440; 1640

L 1400; 1600; 1800
W 1200

L 800
W 600

Possibility to extend the length of the 2 or 4 desk bench by ordering supplementary units.
We recommend to connect up to 6 back to back units.

FEATURES

- Easy to assemble and disassemble - “metal to metal” construction
- Just one tool for assembling (DIN911 S5)

QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2003
- All desks meet the requirements of the LST EN 527-3:2003 standard

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- 10 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches – 1440/1640).

Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal, colour matches the legs.

Legs

- Welded metal tube - 40x40 mm;
- Powder coated metal;
- Plastic feet with height levelling (+10 mm).

MATERIALS

- Melamine: P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), M1 (white), N (grey), M1D2 (white with amber oak edges);
- Metal: E (white), M (metallic), T1 (dark grey), A (black).

GUARANTEE

- 5 years

Desktop type

Plain desktop

Desktops with a scallop for wire management

Desktops with a cut-out for grommet and wire management

ORDERING EXAMPLE

Code structure

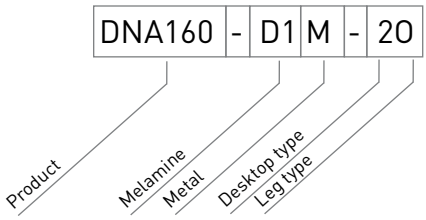

Must be ordered

(for desktop with cut-out)

Metal grommet:
317x119 mm,
H=27 mm

Optional

Power socket blocks

Cable trays

Cable clips



Cable ducts