


Ontvang uw exclusieve aanbieding.
Contact

Voortman meubelen kleurenbrochure

VOORTMAN

MAAT IN KANTOORINRICHTING

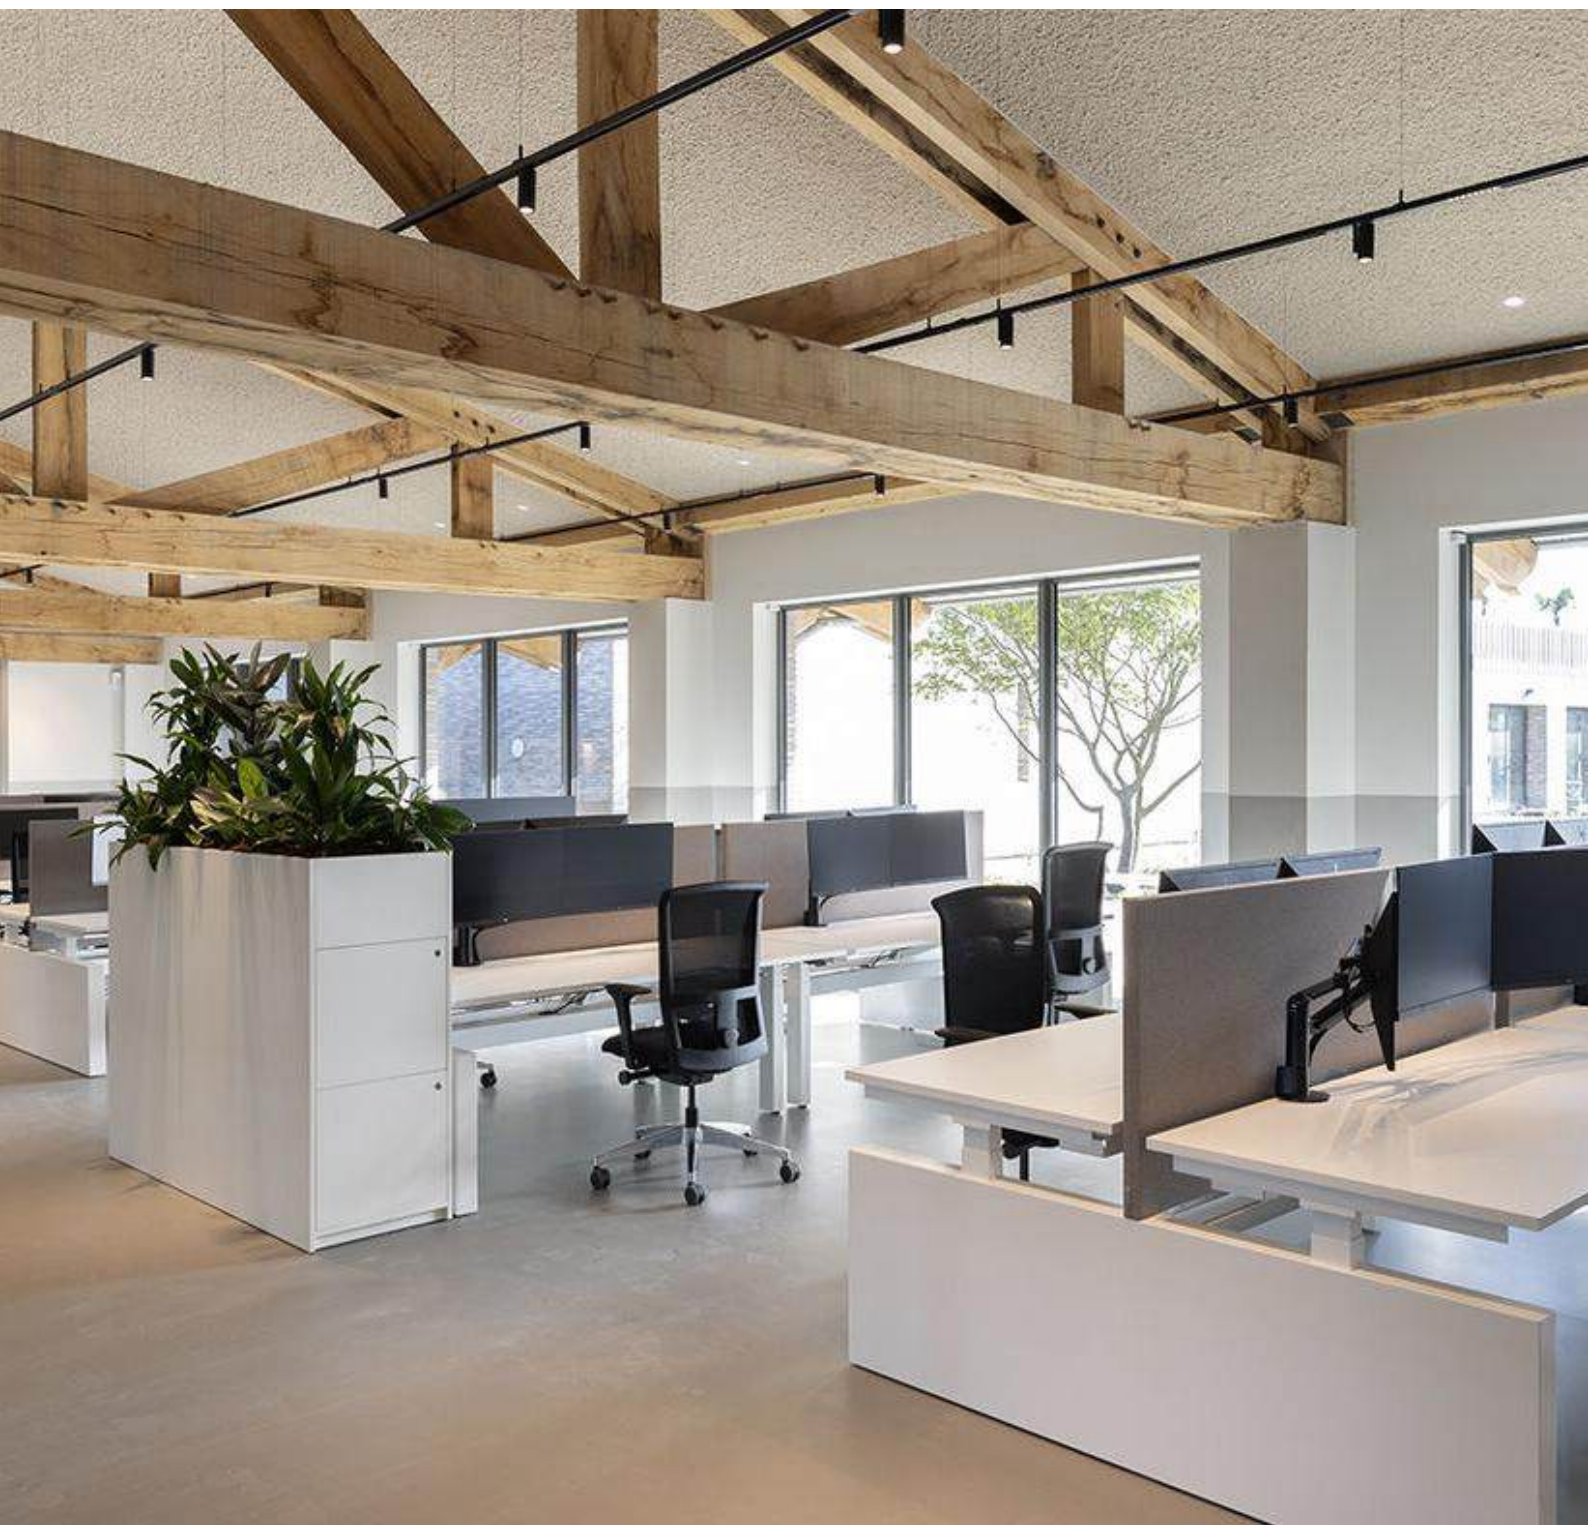

Bladdecoren


Melamine bladen

Gemelamineerd spaanplaat voorzien van 2mm kunststof afwerkrand.

HPL bladen

Spaanplaat, afgewerkt met HPL (High Pressure Laminate) voorzien van 2mm kunststof afwerkrand.

Berken multiplex plaatmateriaal afgewerkt met HPL (High Pressure Laminate). Bladranden met facetcontour freeswerk afgewerkt met blanke lakafwerking en 2mm kunststof afwerkrand.

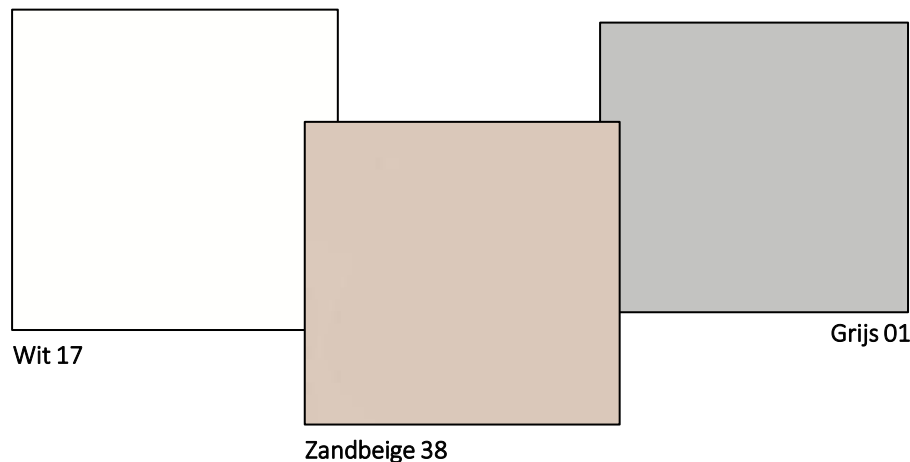

Lakkleuren Hi Tee / Halo pootkolommen

Uni



Wit 03
RAL 9016

Uni



Beigegrijs 33
RAL 7006

Uni



Zwartgrijs 70
RAL 7021

Metallic




Aluminium 32
RAL 9006

Metallic



**Donkergrijs
Metallic 17**

Uni



Diepzwart 05
RAL 9005



Lakkleuren overig

Uni




Wit 03
RAL 9016

Uni




Lichtgrijs 09
RAL 7035

Uni



Beigegrijs 33
RAL 7006

Uni



Zwartgrijs 70
RAL 7021

Uni



Diepzwart 05
RAL 9005

Metallic



Aluminium 32
RAL 9006

Metallic




**Donkergrijs
Metallic 17**

Fijn structuur



Zijde grijs 31
RAL 7044

Fijn structuur




Beigegrijs 23
RAL 7006

Fijn structuur




Diepzwart 24
RAL 9005

Fijn structuur



Zwartoliif 34
RAL 6015

Fijn structuur



Pastelviolet 35
RAL 4009

Fijn structuur



Roodbruin 36
RAL 8012



Stoffen



Stoffen Facet



Ashgrey 40



Natural 01



Beige 1037




Kiezel 7




Dolphin 180



Grey 65



Shitake 124



Taupe 1008




Antracite 67



Zwart 1003



Lightgrey 1000



Middengrijs 1001



Azure 144



Aqua 143



Olive 53



Army 14



Mint 50



Pistachio 52



Yellow 24



Maize 22



Light blue 41




Ocean blue 147



Petrol 56



Blue 45



Navy 1007



Nightshade 178



Indigo 90




Violet 72



Aubergine 74




Purple 78



Rust 29



Terra 31



Orange 2012/b



Mandarin 129



Fire 139




Red 2011



Fuchsia 77



Prune 76



Pink 73



Blossom 166



Dark brown 18

Stoffen Facet

Facet - Article passport

Woolly fabric with a soft grip, made from recycled material.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics

Productgroup	flatweave
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery
Composition faceside	70%RWO 25%PA 5%POF
Composition backside	n/a
Bonding / Coating	n/a
Statistic code	51113080
Dyeing method	yarn dyed
Available colours	41
Packaging	transparent plastic

Durability specifications

Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				DRY	WET	DGM	DGM+	
Abrasion Resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	>100.000		min. 12.000	min. 16.000	A
Pilling	DIN EN ISO 12945-2:2000-11, 2000 cycles	CTL	grade	3-4		min. 3-4	min. 4	C
Colour fastness to light	DIN EN ISO 105-BC2:2014-11, Process 3, exposure level 5							
	light colours	CTL	grade	5		min. 4	min. 5	B
	middle colours	CTL	grade	5		min. 4	min. 5	B
	dark colours	CTL	grade	5		min. 4	min. 5	B
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	5	4-5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	dark colours	CTL	grade	3-4	4	dry: 4, wet: 3	dry: > 4, wet: 3-4	C/A
Ignitability (cigarette test)	 BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324, Schedule 4 part 1 Ignition source 0: cigarette	Centexbel	passed					
	DIN EN ISO 1021-2:2014, Source: smouldering cigarette	Centexbel	passed					
Ignitability (match test)	 BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324, Schedule 5 part 1 Ignition source 1: match flame equivalent	Centexbel	passed					
	DIN EN ISO 1021-1:2014, Source: match flame equivalent	Centexbel	passed					

Processing specifications

Minimum workable width in centimeters	± 145							
Roll length in meters	± 40							
Material weight in grams per linear meter	± 600							
Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				WARP	WEFT	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	455	348	min. 350	min. 400	A/A
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	40,5	35,2	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07, Load 180 N	CTL	mm	2,7	2,7	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a
Chemical substances	REACH	Centexbel	passed					

Cleaning specifications

Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				WARP	WEFT	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	n/a	n/a	n/a	n/a	n/a



Stoffen Board



Natural 01



Lightgrey 60




Zinc 167



Grey 65




Darkgrey 68



Liver 10



Steel 149



Graphite 66



Antracite 67



Onyx 169



Ecru 102




Clay 84




Beige 05




Taupe 12



Darkbrown 18



Brown 15



Chocolate 17




Espresso 123



Darkblue 48



Navy 49



Sesame 113



Yellow pastel
195



Mustard 06



Mango 26



Maize 22




Olive 53



Lime 57



Pistachio 52



Green 55



Fire 139



Red 35



Mandarin 129




Aubergine 74




Fuchsia 77




Purple 78



Winered 39



Blush 92



Magnolia 160



Pink pastel 197



Blossom 166



Mint 50




Ice blue 43



Sky 142



Lightblue 41



Petrol 56



Turquoise 44



Denim 153



Aqua 143



Emerald 184

Item No. / Name	Board				Testresultaat
Samenstelling Composition Zusammensetzung	100% PES				
Slijtage weerstand (toeren Martindale) Abrasion resistance (Rubs Martindale) Scheuerfestigkeit (Touren Martindale)	32.000				EN ISO 12947 1&2
Pilling Pilling resistance Pillbildung	4				EN ISO 12945-2
Treksterkte Tensile (breaking strength) Höchstzugkraft	Ketting Warp Kette	1020 N	Inslag Weft Schuss	1612 N	EN ISO 13934-1
Naadsterkte Seam slippage Nahtschiebefestigkeit	Ketting Warp Kette	3,8 mm	Inslag Weft Schuss	3,2 mm	EN ISO 13936-2
Lichtechtheid Lightfastness Lichtechtheit	Lichte kleuren 4-5 Light colors 4-5 Helle farben 4-5	Midden kleuren 4-5 Middle colors 4-5 Mittlere farben 4-5	Donker kleuren 4 Dark colors 4 Dunkle farben 4		
Rollengte Piece length Rollänge	40 mtr				
Minimaal verwerkbare breedte Minimum usable width Minimum zu verarbeiten Breite	138 cm				
Brandvertragend Flame resistance Flammhemmend	BS5852 (1979) cigarette test				
Doekgewicht Material Weight Stoffgewicht	399 g/lm				
Wrijftechtheid Fastness to Rubbing Reibechtheit	droog dry trocken	4	nat wet nass	3-4	EN ISO 105 X12




Stoffen


Jazz



Ivory 101




Lightgrey 60




Antracite 67




Onyx 169



Espresso 123



Petrol 56



Aqua 143



Natural 01




Beige 05




Capuccino 11




Darkbrown 18



Army 14




Navy 49



Purple 78



Lemon 122



Rust 29



Coral 95



Fuchsia 77



Indigo 90

Stoffen

Jazz

Item No. / Name	Jazz				Test standard
Samenstelling Composition Zusammensetzung	100% Polyester				
Slijtage weerstand (toeren Martindale) Abrasion resistance (Rubs Martindale) Scheuerfestigkeit (Touren Martindale)	72.000				EN ISO 12947 1&2
Pilling Pilling resistance Pillbildung	4				EN ISO 12945-2
Treksterkte Tensile (breaking strength) Höchstzugkraft	Ketting Warp Kette	1380 N	Inslag Weft Schuss	625 N	EN ISO 13934-1
Naadsterkte Seam slippage Nahtschiebefestigkeit	Ketting Warp Kette	2,0 mm	Inslag Weft Schuss	2,0 mm	EN ISO 13936-2
Lichtechtheid Lightfastness Lichtechtheit	>5				EN ISO B02
Wrijfechtheid Fastness to Rubbing Reibechtheid	droog dry trocken	5	nat wet nat	5	EN ISO 105 - X12
Doekgewicht Material Weight Stoffgewicht	490 gr/m				
Rollengte Piece length Rollänge	50				
Minimaal verwerkbare breedte Minimum usable width Minimum zu verarbeiten Breite	138 cm				
Brandvertrangend Flame resistance Flammhemmend	PASS				BS 5852 (1979): the cigarette test

